

Single Basin Faucet

TECK[®]
COMMERCIAL



SPECIFICATION: (EXAMPLE)

- **CAST BRASS** single basin faucet
- Polished chrome-plated
- **CER-TECK[®]** 1/4 turn ceramic structure
- Color indexed metal handle with vandal resistant screw
- Metal hold-down package
and ... with ... (add handle required)

23C1041



Engineer/Architect Approval

Model Specified:

Approval:

Date:

MODEL NUMBER EXAMPLE:

Configurations vary, see below for availability.

23C1043

Outlet

4 = Standard aerator outlet 1.5 gpm (5.7 L/min)

Handle

1 = 5-fluted
3 = Hooded lever
9 = Self-closing 5-fluted

AVAILABLE MODELS		VARIATIONS	
		0	Single Basin Faucet
HANDLE	1 5-Fluted	23C1041	
	3 Hooded Lever 2.75" (70 mm)	23C1043	
	9 Self-Closing 5-Fluted	23C1049	

Single Basin Faucet

TECK[®]
COMMERCIAL


DELTA

APPROVALS:


- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
-  Outlet options is EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

FLOW RATE vs PRESSURE

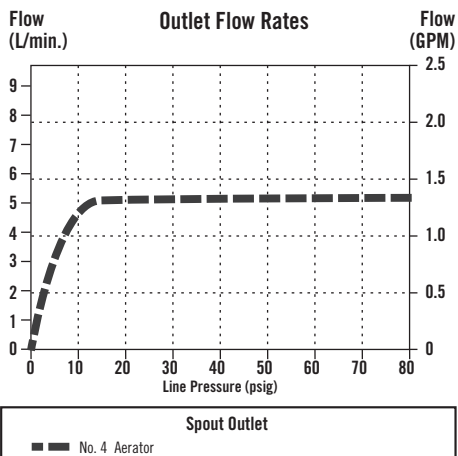


FRONT VIEW

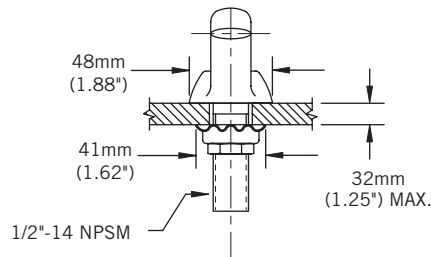


INLET FOR 3/8" OR 1/2" FLEXIBLE RISER
OR 1/2-14 NPSM COUPLING NUT (NOT SUPPLIED)

SIDE VIEW

Handle No. 1 and 9

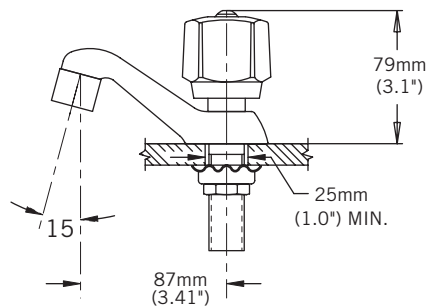

Handle No. 3

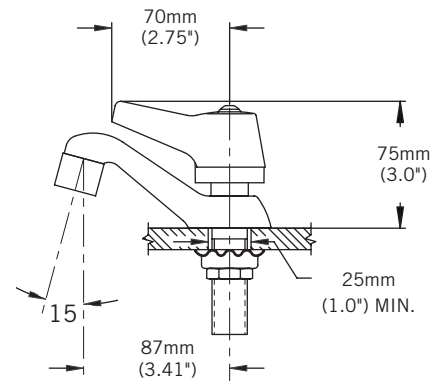

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Refer to www.specselect.com for individual models.

DSP-23C10 Rev. D

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.