

Pre-Rinse Faucets

TECK®
COMMERCIAL



Specification: (example)

- **CAST BRASS Wallmount** pre-rinse faucet
- 203mm (8"), two handle, integral check stops
- **TUF-TECK®** compression structures
- Polished chrome plated finish trim
- ADA compliant, color indexed, vandal resistant, 76mm (3.0") metal lever blade handles
- 3/8" IPS rigid riser, wall bracket, spray head hook and ...
- with ... (add No. 5 product variation)
- with ... (add outlet required)
- with ... adjustable centers (add Suffix **AC** if required) (see Back Page)



55T1513

Specification: (example)

- **CAST BRASS Deckmount** pre-rinse faucet
- Two handle, Inlet check tails
- Polished chrome plated finish
- **TUF-TECK®** compression structures
- ADA compliant, color indexed vandal resistant, 76mm (3.0") metal lever blade handles
- 3/8" IPS rigid riser, wall bracket, spray head hook and ...
- with ... (add product variation No. 2 or No. 3)
- with ... (add outlet required)

Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	PRODUCT NO.		
Pre-Rinse Faucet	55T1		3

For 55T1090 Add-On Faucet, see back page

See back of this page for flow rates



PRODUCT VARIATION	OUTLET	HANDLE
0 ☐	0 ☐	0 ☐
1 ☐	1 Spray with Spring Loaded S.S. Hose Auto Shut-off ☐	1 ☐
2 203mm (8") Deckmount Faucet ☐	2 ☐	2 ☐
3 102mm (4") Center Deckmount Faucet ☐	3 ☐	3 76mm (3") Lever Blade Handles ☒
4 ☐	4 ☐	4 ☐
5 203mm (8") Center Wallmount Faucet ☐	5 ☐	5 ☐
6 ☐	6 ☐	6 ☐
7 ☐	7 ☐	7 ☐
8 ☐	8 Same as No. 1 Above but with Add-On Faucet (S5), 1.5 USGPM (5.7 L/min.) Aerator (1) ☐	8 ☐
9 ☐	9 ☐	9 ☐

(1) Available **Optional Swing Spouts**. These spouts can ONLY be added to **Outlet Option No. 8**, and **55T1090**. Refer to www.specselect.com for individual models.

Note: Use this page front and back as a product submittal sheet.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.


DSP-55T Rev. B

Approvals:

- CSA certified
- Complies to ASME A112.18.1
- Lever Blade Handle
ADA Compliant and meets Handicapped Accessibility Standard ASME A117.1 of less than 5 lbs. operating force.
- Energy Saver Spray certified to ASTM F2324-03 in accordance with the Energy Policy Act of 2005
(Contact Delta Representative for State and/or Local Approvals.)



FLOW RATE vs PRESSURE

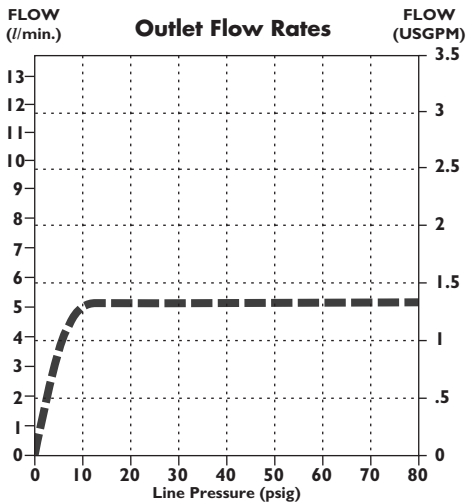

Add-On Spout Outlet

■ Aerator

Flowrate w/ Standard Pre-Rinse Spray Outlet
1.6 USGPM @ 60 PSI

Flowrate w/ Energy Saver Pre-Rinse Spray Face
(Also supplied with standard product)
1.2 USGPM @ 60 PSI

PRODUCT VARIATION No. 5

INLETS - 1/2 - 14 NPT (Female) or 1/2 - 14 NPT (Male) with Supplied Nipple


PRODUCT VARIATION No. 2 & 3

INLETS - 3/8 or 1/2" Flexible Riser or 1/2 - 14 NPSM Coupling Nut (Supplied)


Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Wallmount Faucet ADJUSTABLE CENTERS

ADD Suffix "AC" to Product Number

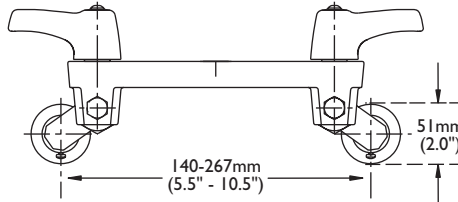

WALL BRACKET

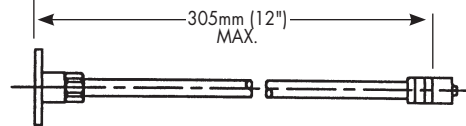

ADD-ON FAUCET

Outlet Option No. 8


MODEL No. 55T1090

(Will add 152mm (6") to overall height if ordered and installed separately.)

FOR OPTIONAL SWING SPOUTS


See DSP-S/S for detailed specification
(Found in the "Add-On Option" section when using the printed spec binder)

Thin Wall Installation

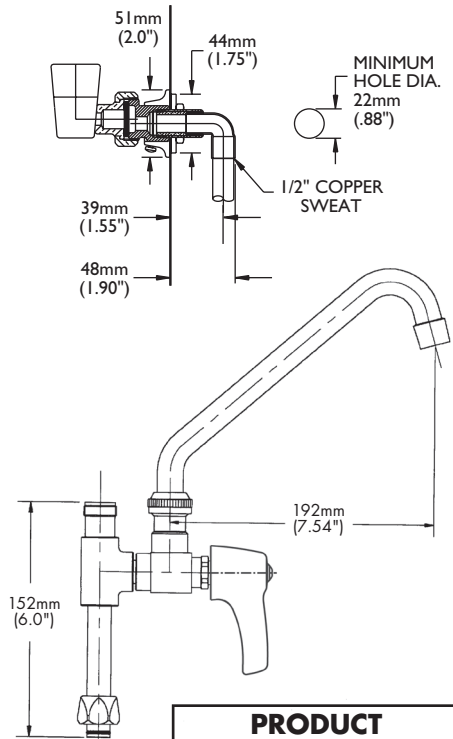

PRODUCT VARIATION No. 2

Note: Overall Height
850mm (33.5") for No. 1 Outlet
885mm (34.9") for No. 8 Outlet



PRODUCT VARIATION No. 3

Note: Overall Height
850mm (33.5") for No. 1 Outlet
885mm (34.9") for No. 8 Outlet

