

630TP Series – Electronic Faucet Trim

For Recess Mounted Control Box

TECK®
COMMERCIAL



Specification: (example)

- Supplied as trim parts only – requires separate order of ELAVT0001ARI* or ELAVT0008ARI* rough-in to have complete product
- Proximity® Sensing Technology**
- Chrome plated Ara® spout
- Battery** (4 "C" cell) or **Hardwire** (24 VAC)
- Adjustable sensing range and timeout
- Serviceable filter screen upstream of the solenoid valve
- Metal hold-down package
- and... with... (specify battery or hardwire)
- with... (add outlet required)
- with... (specify finish)
- with... (4" coverplate – specify separately – see next page)
- with... (for hardwire with battery backup – specify separately – see next page)
- with... (transformer required for hardwire models – specify separately – see next page)

630TP358TR



Engineer/Architect Approval

Model Specified:

Approval:

Date:

DESCRIPTION	TRIM PRODUCT NO.					FINISH
Trim Only for Hardwire	630TP3		8	TR		Chrome
Trim Only for Battery Operated	631TP3		8	TR		
Trim Only for Hardwire	630TP3		8	TR	-SS	Brilliance® Stainless
Trim Only for Battery Operated	630TP3		8	TR	-SS	



**Rough-In Product
Number ELAVT0001ARI*
or ELAVT0008ARI* –
Order separately**

SPOUT VARIATION	OUTLET	CONTROL BOX
0 ☐	0 ☐	0 ☐
1 ☐	1 ☐	1 ☐
2 ☐	2 Vandal Resistant 1.5 gpm (5.7 L/min.) Laminar Outlet  ☐	2 ☐
3 Single Hole Deckmount Ara® Spout  ☒	3 ☐	3 ☐
4 ☐	4 ☐	4 ☐
5 ☐	5 Vandal Resistant 0.5 gpm (1.9 L/min.) Laminar Outlet  ☐	5 ☐
6 ☐	6 ☐	6 ☐
7 ☐	7 ☐	7 ☐
8 ☐	8 ☐	8 12" S/S Cover, Driver Board, Solenoid for use with ELAVT0001ARI* or ELAVT0008ARI* (Rough-in ordered separately) ☒
9 ☐	9 Vandal Resistant 0.35 gpm (1.32 L/min.) Non-Aerating Spray Outlet  ☐	9 ☐

*ELAVT0001ARI – no mixing valve or ELAVT0008ARI with thermostatic mixing valve – specify separately.
Refer to www.specselect.com for individual models.

Flow Rates are at 60 PSI.
Note: Use all pages as product submittal sheets.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation.
Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-630TPCB8 Rev. A



TECK[®]
COMMERCIAL

630TP Series – Electronic Faucet Trim For Recess Mounted Control Box


Approvals:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Outlet option 2 is EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

Patented

FLOW RATE vs PRESSURE

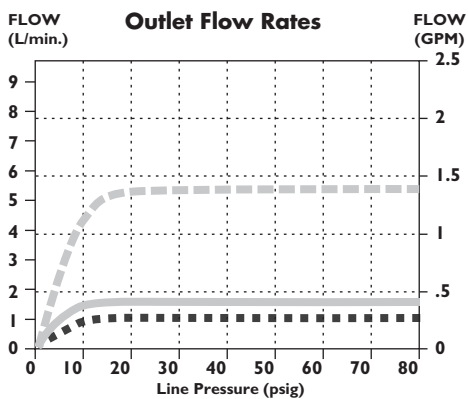


Spout Outlets


- No. 2 Laminar Outlet
- No. 5 Laminar Outlet
- ... No. 9 Non-Aerating Spray

630TP SERIES


FRONT VIEW

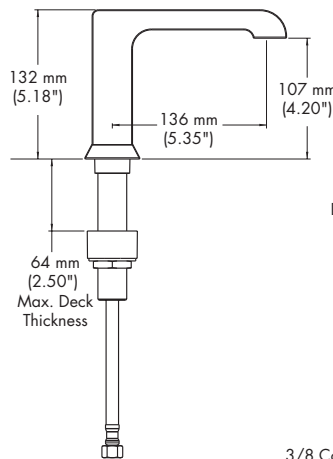

SIDE VIEW

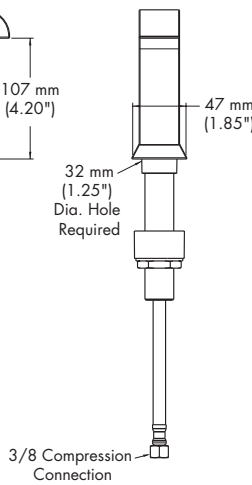


TYPICAL INSTALLATION

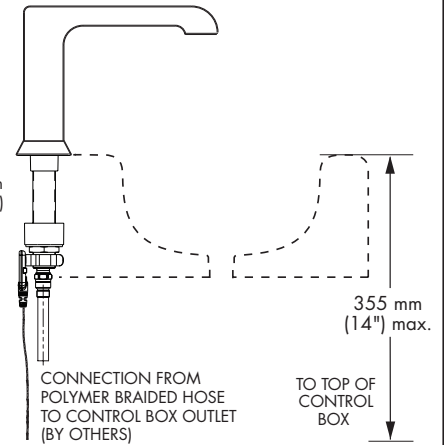


4" COVERPLATE (ORDER SEPARATELY)

FRONT VIEW

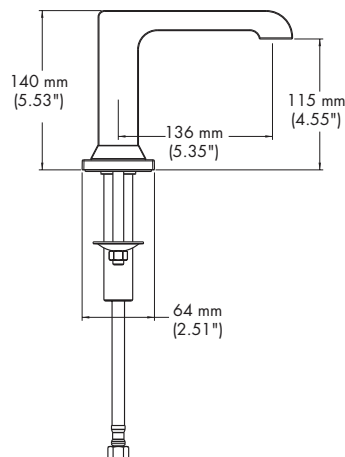

SIDE VIEW

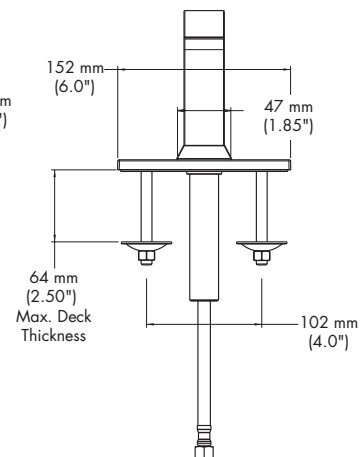

Available Optional Coverplates for Field Conversion – Specify separately

PRODUCT NO.	FINISH	DESCRIPTION
061305A	Chrome	4" Coverplate
061305SS	Brilliance [®] Stainless	4" Coverplate



Cast coverplate with anti-rotation pin for secure public washroom installation

Refer to www.specselect.com for individual models.
Product supplied as shown by solid lines. All items shown by dotted lines supplied by others.

Flow Rates are at 60 PSI.
Note: Use all pages as product submittal sheets.

630TP Series – Electronic Faucet For Recess Mounted Control Box

**TECK®
COMMERCIAL**



630TP33 & 631TP33 SERIES

- ☐ **630TP3** Hardwire
- ☐ **631TP3** Battery Operated

OPERATION:

- Hands free (touchless) operation.
- No visible sensor, the spout is the sensor.
- Water flows when sensing is activated.
- Water flow stops upon de-activation of sensing.
- Adjustable sensing distance factory set to 76 mm (3").
- Low battery audible beep (for battery models only) will activate after faucet shuts off when approximately 1500 cycles remain.
- Adjustable auto shut off feature. Factory set to 45 seconds.
- Metering mode with selectable flow times of 7 seconds to 4 minutes, factory set off.
- Periodic Rinse feature, time adjustable in 6 hour increments up to 2 days. Selectable rinsing lengths from 10 to 180 seconds. Factory set off.

NOTE 1: For optimum performance of this product, we recommend a system pressure between 20 and 80 PSI static. This product will operate up to a maximum of 125 PSI static per ANSI and CSA requirements. However, we do not recommend pressures above 80 PSI. Thermal expansion or leaking pressure reducing valves may require use of expansion tanks or relief valves to ensure your system never exceeds its maximum intended pressure setting.

NOTE 2: Trim used with ELAVT0001ARI designed for routine 180°F (82°C) disinfection cycles up to 10 minutes. Trim used with ELAVT0008ARI is not recommended for high temperature disinfection cycles as the thermostatic mixing valve limits the higher temperature flow outlet


NOTE 3: Use 3-conductor 18AWG wire between transformer and hardwire converter/driver board earth ground.

NOTE 4: Use Delta Commercial approved transformers and mount the transformer a minimum of 6 inches away from the Delta driver board enclosure.

NOTE 5: Refer to Proximity Application Notes for installation best practices, proper grounding and wiring diagrams on www.specselect.com.

630TP SERIES ELECTRONIC DECK MOUNT LAVATORY FAUCET

ELECTRICAL SCHEMATICS

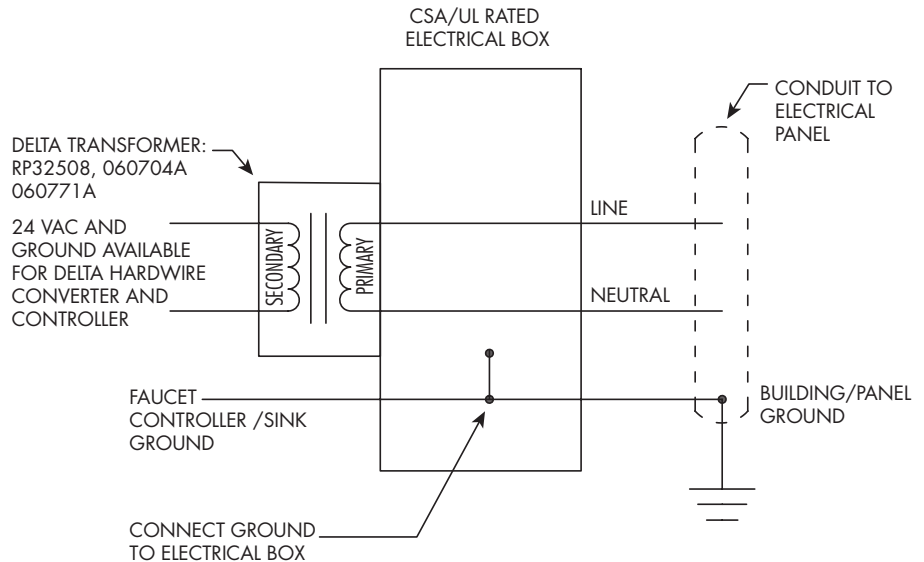

Available Options for Field Conversion

- ☐ **061047A**
Hardwire with Battery Backup
See DSP-BB for detailed specification.
- ☐ **060651A**
3 Position Switch
See DSP-ELACC for detailed specification.

OPTIONAL ACCESSORIES

✓	TRANSFORMERS		
	060704A	110 to 24VAC Class II 20VA	(Up to 5 Electronic Valves)
	060771A	110 to 24VAC Class II 40VA	(Up to 10 Electronic Valves)
✓	CORDS		
	061256A	36" Cable Extension	

Note: Measurements may vary $\pm 6\text{mm}$ (0.25")

Batteries included on all battery models.
Refer to www.specselect.com for individual models.

Note: Use all pages as product submittal sheets.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DSP-630TPCB8 Rev. A