



Two Handle 8.0" (203 mm) Deck-Mount Pre-Rinse Kitchen Faucet with Add-on Faucet

55C1283-S8

Description

Two handle 8.0" (203 mm) deck-mount pre-rinse kitchen faucet with 3.0" (76 mm) hooded lever handles. Featuring a spray outlet, spring loaded stainless steel hose and auto shut-off. Includes 1.5 gpm (5.7 L/min) add-on faucet with 14.0" (356 mm) tubular spout.

Specification

- Flow Rate: 1.05 gpm (4.0 L/min) pre-rinse spray outlet and 1.5 gpm (5.7 L/min) add-on faucet
- Spout Type: Pre-rinse spout
- Finish: Chrome

Features

- CAST BRASS 2 handle pre-rinse faucet
- Polished chrome-plated finish trim
- ADA compliant, color indexed, vandal resistant, 3.0" (76 mm) metal lever blade handles
- Self-close pre-rinse spray with spring loaded stainless steel hose with wall bracket and spray head hook
- Inlet check tails to prevent crossflow
- 8.0" (203 mm) Deck mount pre-rinse faucet with inlet check tails
- Includes 1.5 gpm (5.7 L/min) add-on faucet with 14.0" (356 mm) tubular spout

Operation

- CER-TECK® 1/4 turn structures

Optional Accessories

- For Alternate Swing Spouts - see DSP-S/S for detailed specification



Complies With

- For Commercial use ONLY
- ASME A112.18.1 / CSA B125.1
- Lever Blade Handle compliance to ICC / ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations



**Lever Handle
Only
Poignée à levier
seulement**



(Contact Delta Representative for State and/or Local Approvals)


NOTICE Dimensions are for reference only, measurements may vary $\pm 0.25"$ (6 mm).
Maximum flow rates - 60 psi (414 kPa).

Masco Canada Limited reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

© 2025 Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

55C1283-S8

This spec was produced on May 15, 2025.

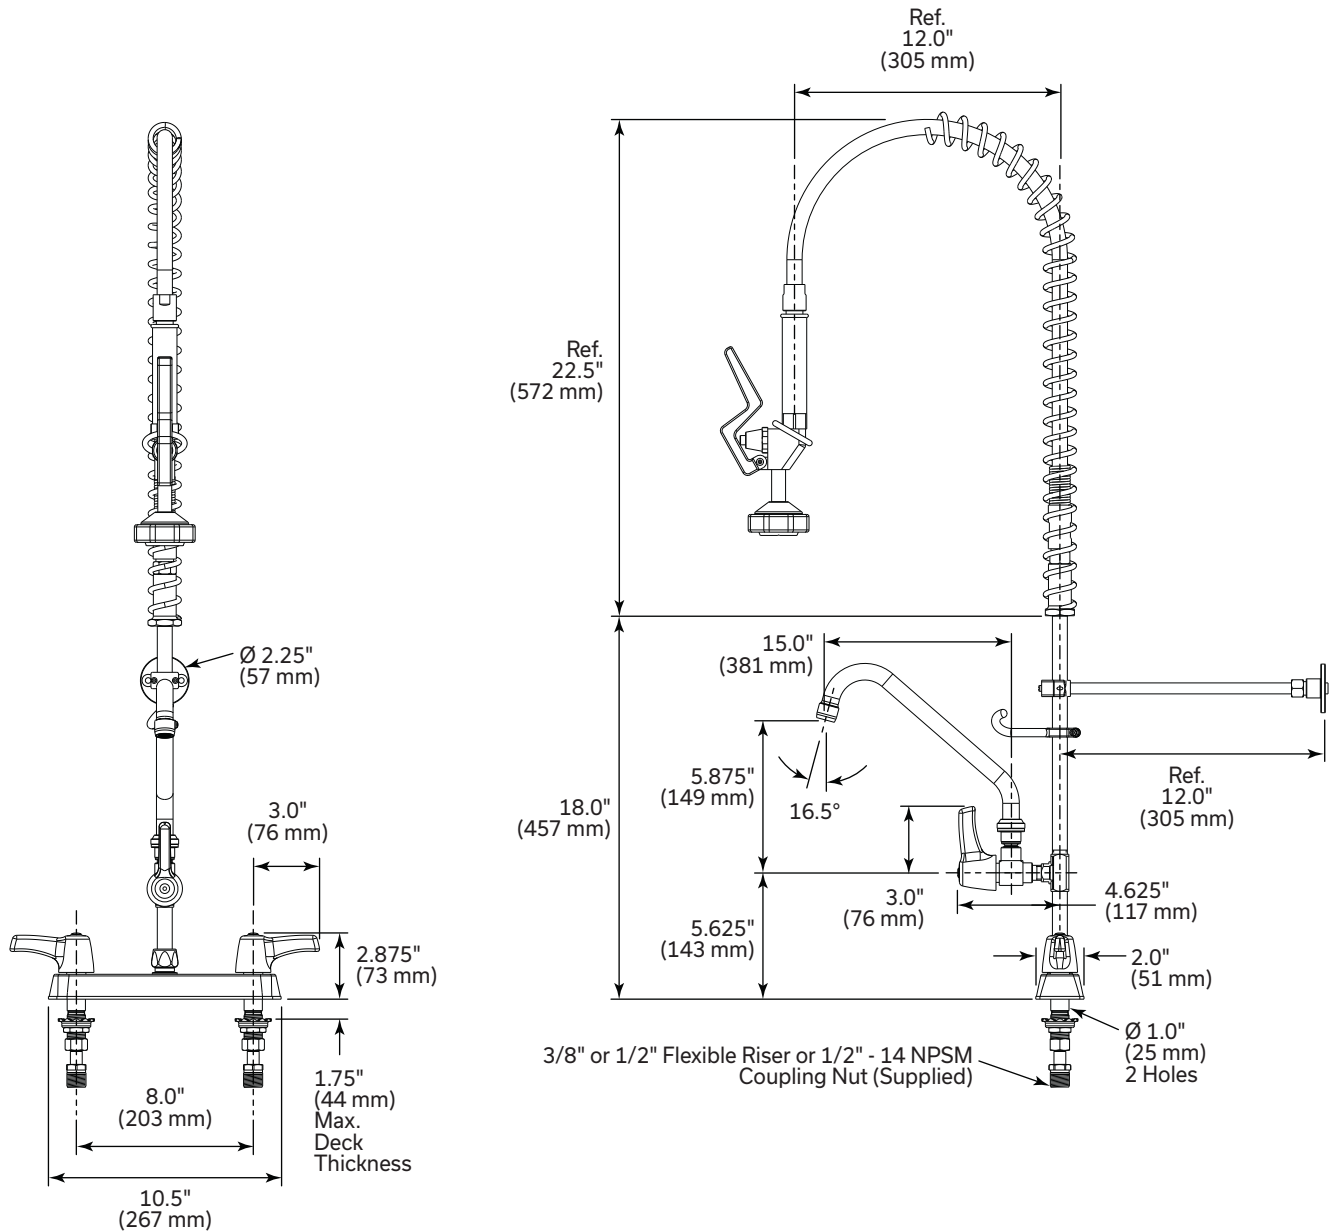

NOTICE Dimensions are for reference only, measurements may vary $\pm 0.25"$ (6 mm).
Maximum flow rates - 60 psi (414 kPa).

Masco Canada Limited reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book for finish options and product availability.

© 2025 Masco Canada Limited
350 South Edgeware Rd, St Thomas, Ontario, Canada N5P 4L1
1-800-387-8277

55C1283-S8

This spec was produced on May 15, 2025.