3000T3 Series – Electronic Faucet
With Surface Mount Control Box and Single Inlet Supply

TECK® COMMERCIAL

DELTA

Specification: (example)

- Supplied as complete product only
- **H2Optics®** technology – no external adjustments required
- Chrome plated one piece cast main body with integral sensor
- **Battery** (4 'C' cell) or **Hardwire** (24 VAC) infrared electronic handwash system
- Field adjustable water resistant program controller with LCD screen
- Forged brass solenoid valve
- Surface mount housing
- Mixing valve required (order separately)
- Serviceable filter screen upstream of the valve

and... with... (specify battery or hardwire)
with... (add spout variation required)
with... (add outlet required)
with... (Keyed Switch – add suffix **-KS** if required – See Next Page)
with... (transformer for hardwire operation – specify separately – See Next Page)

3000T3 SERIES



Engineer/Architect Approval

Model Specified:

Approval: Date:

DESCRIPTION	PRODUCT NO.					
Hardwire	**3000T3**			**0**	**A**	
Battery Operated	**3001T3**			**0**	**A**	
Hardwire with Battery Backup	**3000T3**			**0**	**A**	**-BB**

C SP® US

SPOUT & SENSOR

	✔
0	☐
1	☐
2	☐
3 (R5) Single Hole Deckmount Gooseneck Spout with Integral Sensor in Base (1)	☐
4 (R5) Deckmount Gooseneck Spout with Integral Sensor in Base and 4" Forged Coverplate (1)	☐
5 (R5) Gooseneck Spout with Integral Sensor in Base and 8" Forged Coverplate (1)	☐
6	☐
7	☐
8	☐
9	☐

OUTLET

	✔
0	☐
1	☐
2 Vandal Resistant 1.5 gpm (5.7 L/min) Laminar w/Agion® Antimicrobial	☐
3 Vandal Resistant 1.5 gpm (5.7 L/min) Flow Control Aerator	☐
4	☐
5	☐
6	☐
7 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 1.5 gpm (5.7 L/min.)	☐
8 Smooth End, Laminar Flow Control in Base of Gooseneck Spout 0.5 gpm (1.9 L/min.)	☐
9	☐

CONTROL BOX

	✔
0 Surface Mount Housing* SEE Specification Drawing #5	✔
1	☐
2	☐
3	☐
4	☐
5	☐
6	☐
7	☐
8	☐
9	☐

***Mixing valve** (order separately). (1) Optional spouts R3, R7 and R35 **only** available in this series due to fixed gooseneck supplied.
Refer to www.specselect.com for individual models.

Flow Rates are at 60 PSI.
Note: Use these pages as product submittal sheets.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation.
Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

DELTA

TECK® COMMERCIAL

3000T3 Series – Electronic Faucet
With Surface Mount Control Box and Single Inlet Supply


Approvals:

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Outlet options 2, 3 and 7 are EPA WaterSense listed
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

Patented

FLOW RATE vs PRESSURE

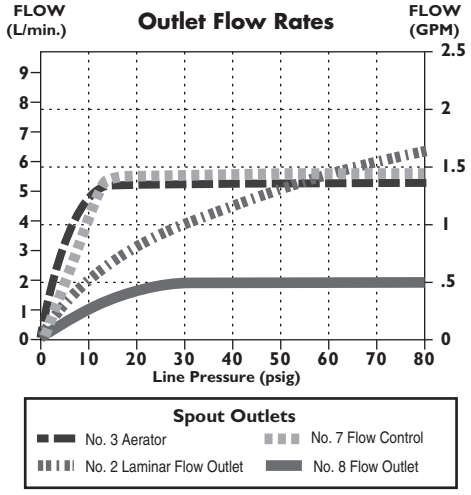


OPERATION:

- Water flows when sensor is activated.
- Water flow stops at the selected run-on time after user removes hands from sensing zone. Run-on time selections are 0 to 8 seconds or 1 to 8 minutes for scrub-up applications. Factory set to 0 seconds.
- Blocking time between uses has selectable range of 1 to 8 seconds. Factory set to 1 second.
- Adjustable response time.
- Auto shut-off feature.
- Optional metered program mode with selection of 7 to 240 seconds of continuous operation.
- Adjustable sensing distance 76 to 381mm (3" to 15") factory set to 254mm (10") (± 3.0").


NOTE: Designed for routine 171°F (77°C) disinfection cycles up to 30 minutes.

Note: Measurements may vary ± 6mm (0.25")


GOOSENECK SPOUT #3 (NO COVERPLATE)

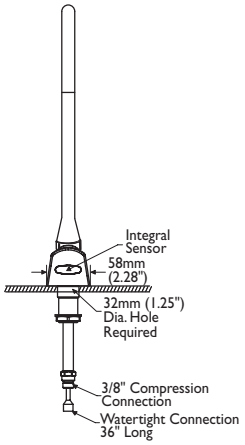


SPOUTS WITH OUTLET ENDS




SPOUTS WITH SMOOTH ENDS




GOOSENECK SPOUT #4 & #5 (WITH COVERPLATE)

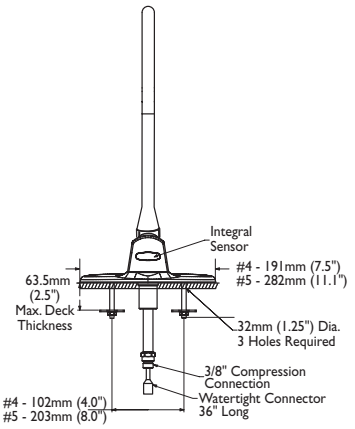


TYPICAL INSTALLATION

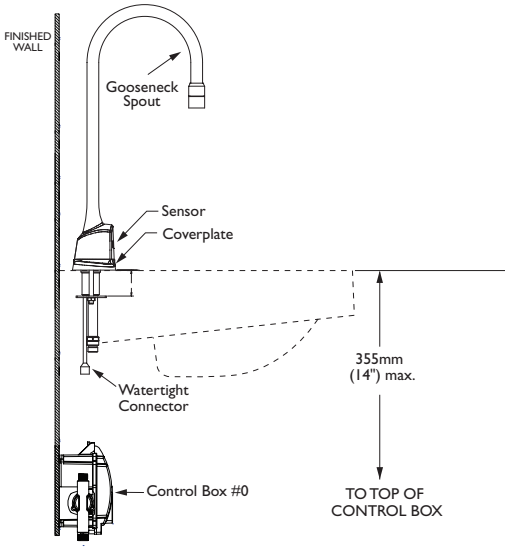

SPOUTS WITH OUTLET ENDS

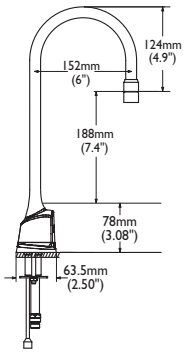

SPOUTS WITH SMOOTH ENDS

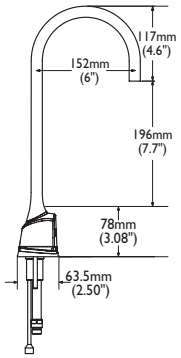

OPTIONAL DECK MOUNT MIXING VALVE

❑ **24T3003**

See DSP-24T3003 for detailed specification.

OPTIONAL 3 POSITION SWITCH

❑ Add suffix **"-KS"** to Product Number for Keyed Switch. **See DSP-ELACC for detailed specification**.

3000T & 3001T ELECTRONIC FAUCET OPTIONAL ACCESSORIES:

✔	TRANSFORMERS:		
	060704A	110 to 24VAC Class II 20VA	(Up to 5 Electronic Valves)
	060771A	110 to 24VAC Class II 40VA	(Up to 10 Electronic Valves)
	060772A	110 to 24VAC Class II 100VA	(Up to 25 Electronic Valves)
✔	**CORDS:**		
	061256A	36" Cable Extension	

Refer to www.specselect.com for individual models.
Product supplied as shown by solid lines. All items shown by dotted lines supplied by others.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.

Specification Drawing #5

TECK® COMMERCIAL

DELTA

SURFACE MOUNT CONTROL BOX #0

3000T3 SERIES

✔	PRODUCT NO.					VALVE TYPE	COVER
	3000T3			0	A	Wallmount Handwash Hardwire	Surface Mounted, Vandal Proof Control Housing
	3001T3			0	A	Wallmount Handwash Battery	Surface Mounted, Vandal Proof Control Housing


VANDAL PROOF SURFACE MOUNT CONTROL HOUSING


3000T3 SERIES


Battery Operated – Box shown.

Hardwire Version comes complete with Watertight Connector and Hardwire Converter 24VAC to 6VDC.

Hardwire with Battery Backup (-BB) comes complete with Watertight Connector, Hardwire Converter 24VAC to 6VDC and 9V battery. **See DSP-BB for detailed specification**.

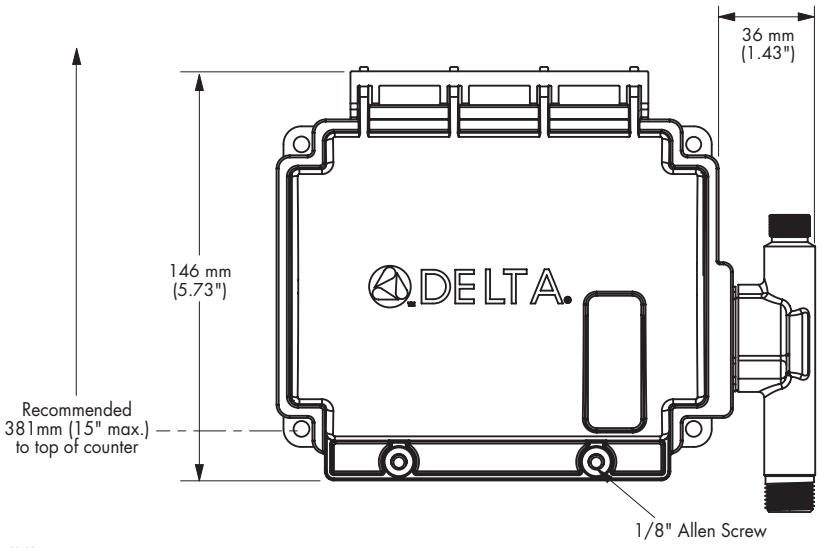


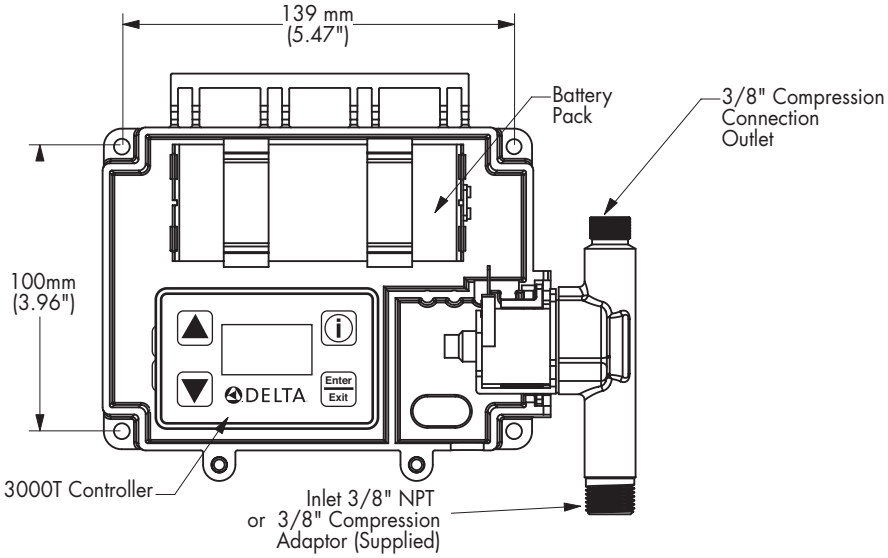

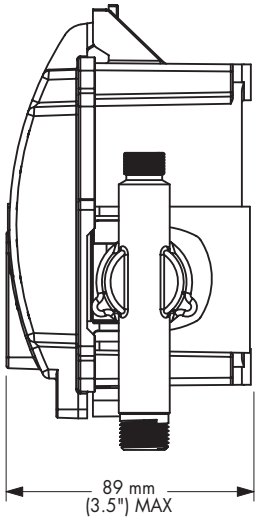

BRAIDED HOSE

Note: Hose connections supplied between Solenoid Valve and Spout



Note: Measurements may vary ± 6mm (0.25")
Refer to www.specselect.com for individual models.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.