


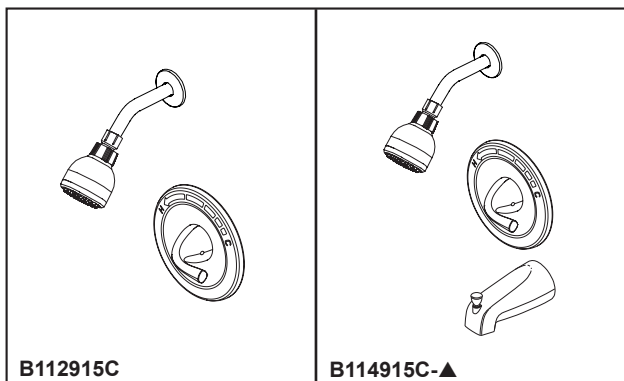

see what Delta can do™

TUB AND SHOWER FAUCET


- Foundation® Collection
- Shower Only (B112915C Series)
- Tub/Shower (B114915C Series)

FEATURES:

- Touch-Clean® spray holes



STANDARD SPECIFICATIONS:

- Shower head max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Pressure balanced bath mixing valve.
- Tub/Shower require min. 1 1/2" wall cavity.
- Slip-on tub spout, model B114915C.
- Valve has back-to-back installation capability.
- Forged brass body.
- Cartridge utilizes integral check valves to prevent the cross flow of water within the valve.
- Valve reduces the flow of water to 0.5 GPM within 5 seconds of the complete loss of pressure in the hot or cold water supply line.
- Outlet water temperature is maintained within $\pm 3^\circ$ F variation with changes in either hot or cold supply of up to 50 percent of the normal supply pressure.
- Temperature is controlled by handle with cold water always coming on first.
- Field adjustable means to limit handle rotation into hot water zone. Per ASSE 1016.
- Temperature control to rotate a maximum of 120° from full cold to the maximum temperature
- Hot & Cold temperature indicators on escutcheon
- All parts replaceable from the front of the valve
- 1 Spray settings include: Full Body spray

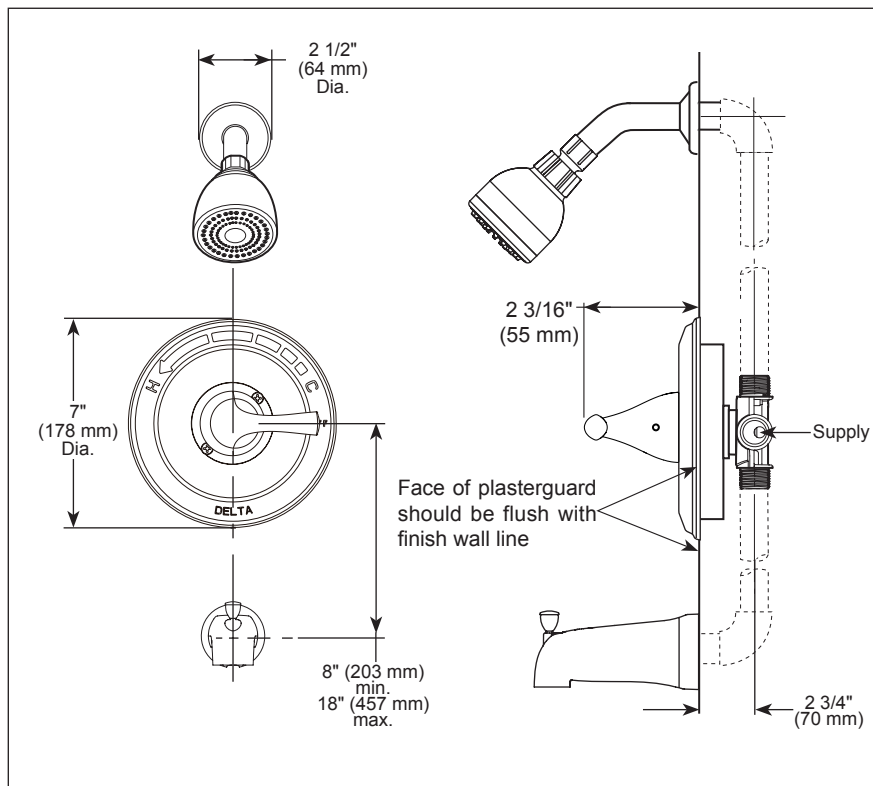

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

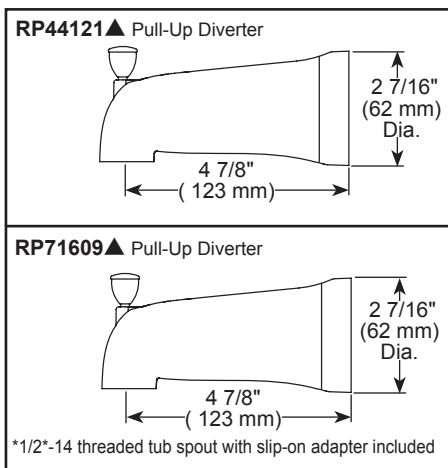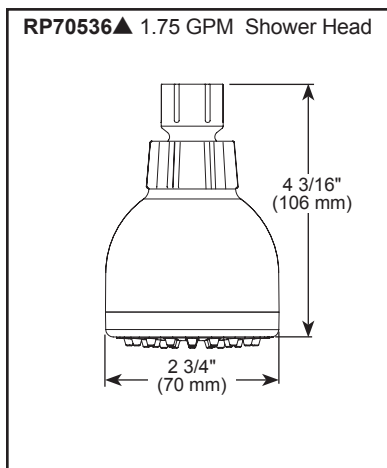

▲ Designate proper finish suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company