


144823-▲


see what Delta can do℠

TUB AND SHOWER FAUCET TRIM


■ Everedge™ Bath Collection

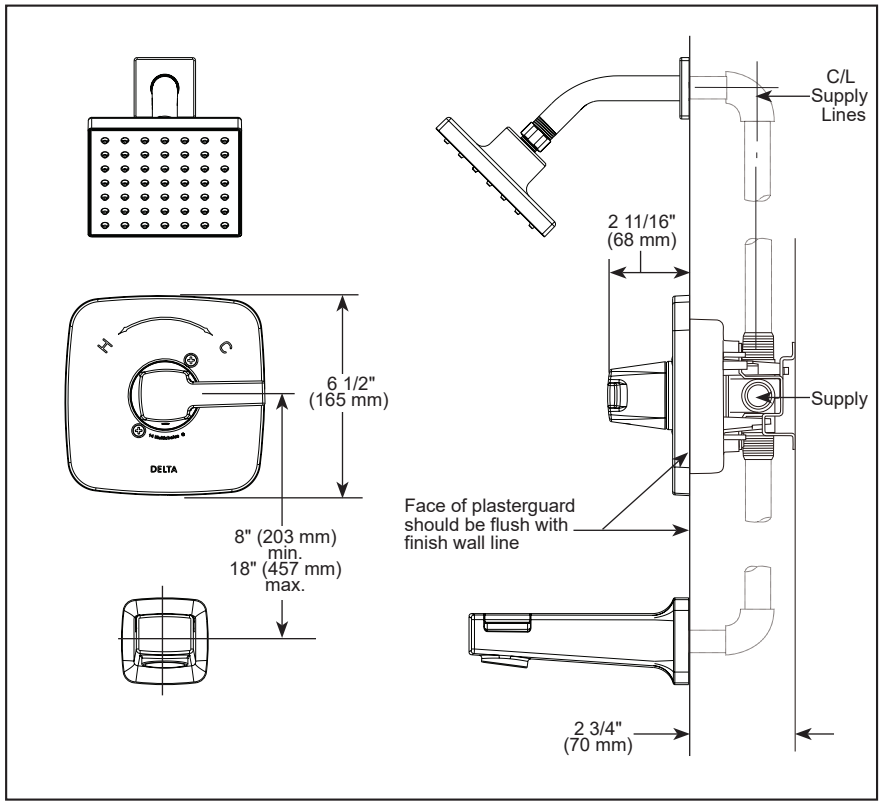


RP101846▲ Shower Head

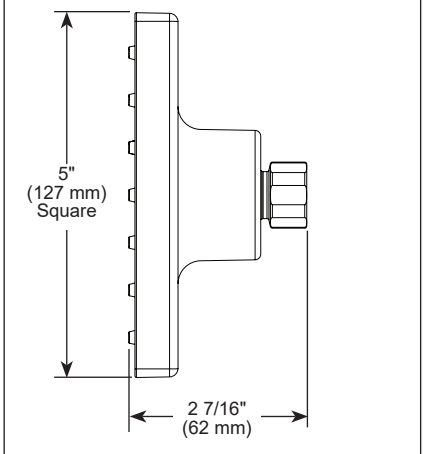

RP104426▲ Tub Spout - Diverter

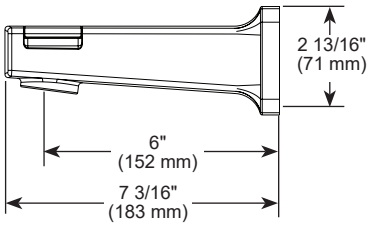

RP77991 Available Extension Kit



▲ Designate Proper Finish Suffix

FEATURES:

- 14 Series pressure balanced single handle bath mixing valve trim
- Single setting shower head

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Temperature only controlled with handle
- Field adjustable means to limit handle rotation into hot water zone
- 120˚ maximum handle rotation
- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Tub port maximum flow rate 6.0 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Laser etched temperature indicators on escutcheon
- 1/2" CWT slip-on spout adapter
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:


- ASME A112.18.1/ CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only


Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.


DSP-B-144823 Rev. A

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1

© 2025 Delta Faucet Company

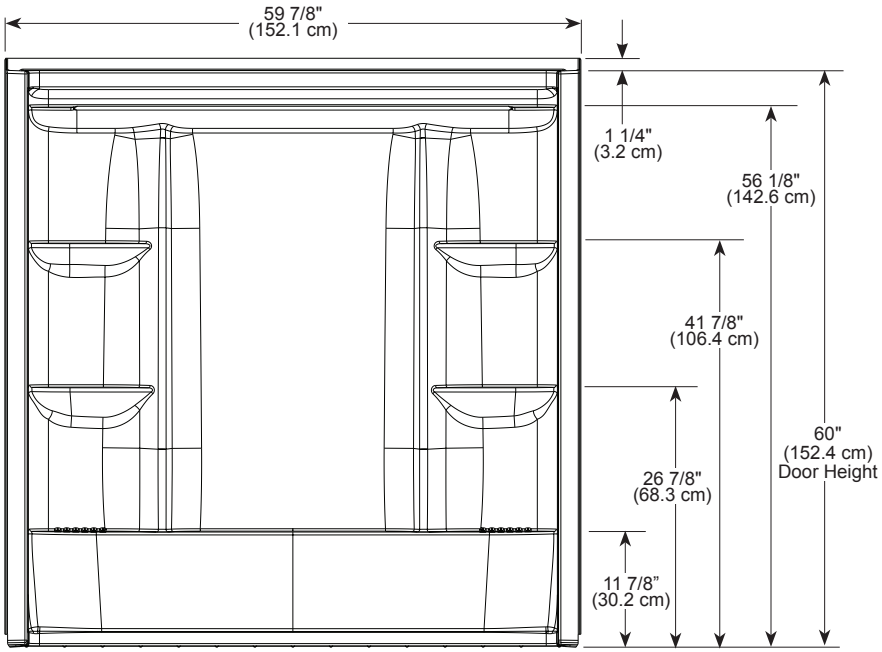

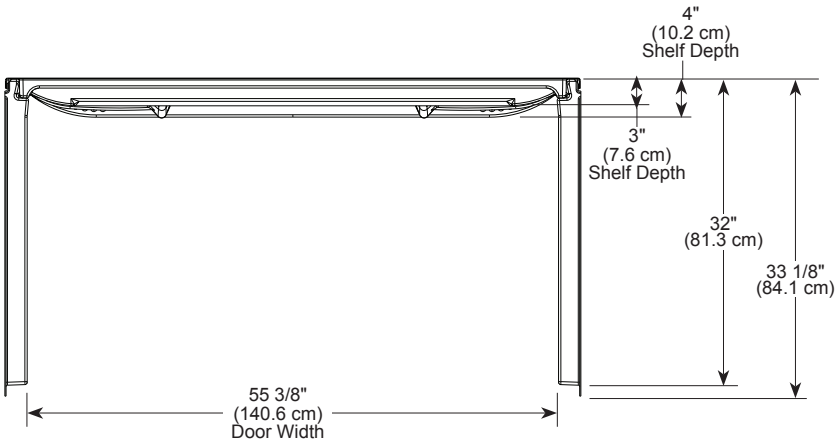


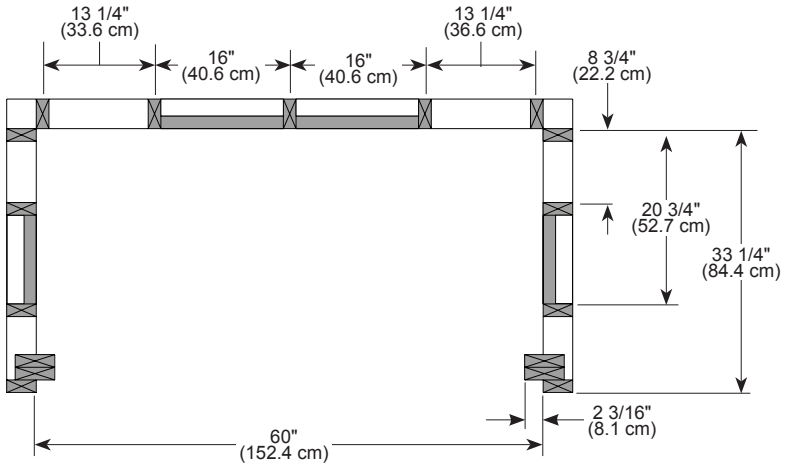

see what Delta can do℠

EverEdge™

B23207-6032-WH
60" X 32" THREE-PIECE
BATHTUB WALL SET



STANDARD SPECIFICATIONS:

- Caulkless Installation
- Direct-to-stud installation
- Accessory Ledge
- Made with High-Gloss ProCrylic™ Material
- 10 Year Limited Residential Warranty
- 1 Year Limited Commercial Warranty


COLOR/FINISH

- White

COMPLIES WITH:

- CSA B45.5/IAPMO Z124


Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2022 Delta Faucet Company

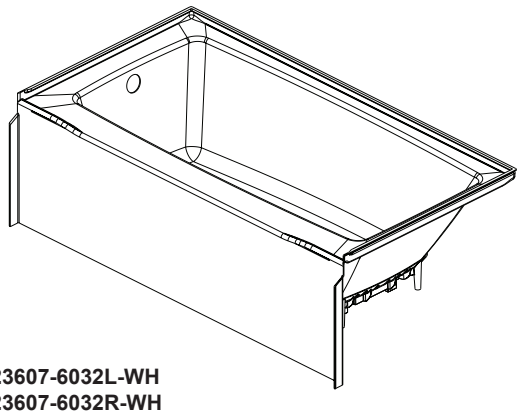

B23607-6032L-WH
B23607-6032R-WH
Left Drain Shower Base Shown

Submitted Model No.: _____

Specific Features: _____

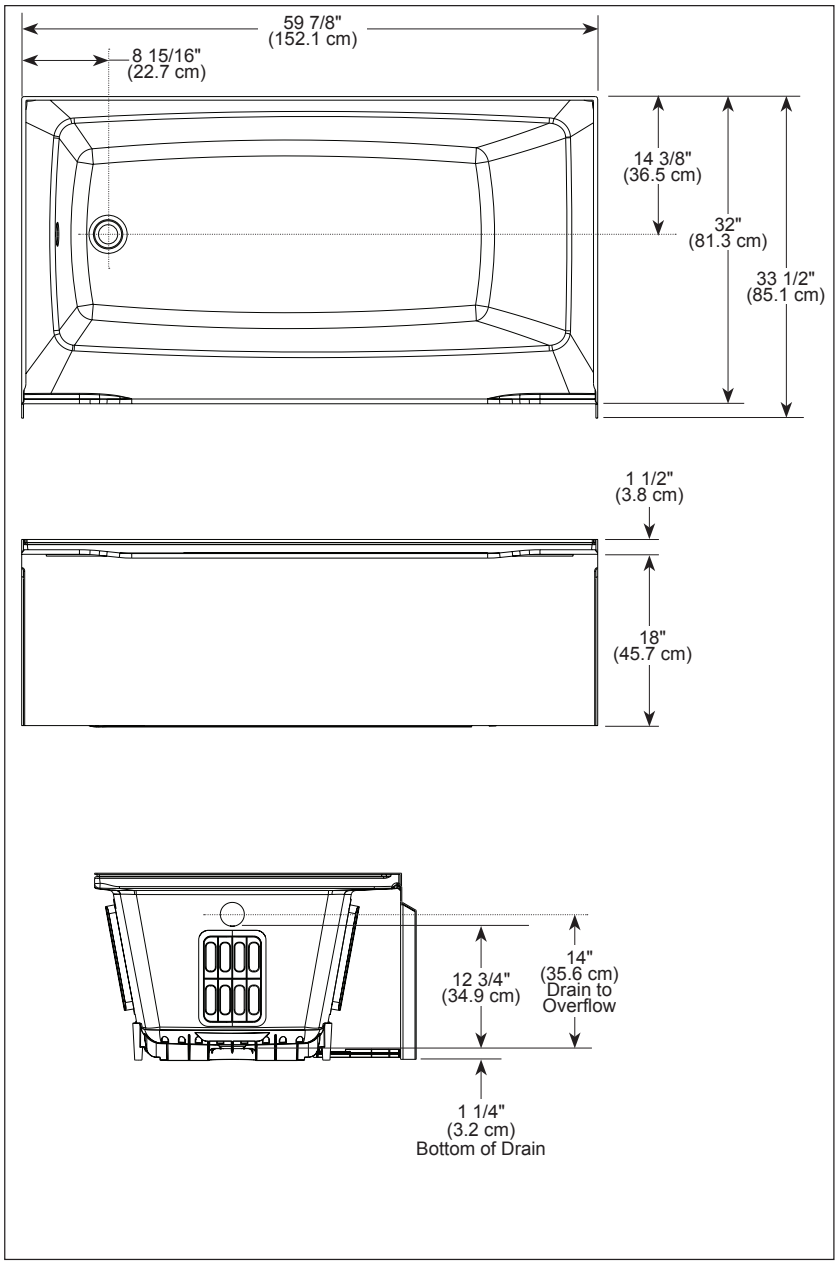

DELTA

see what Delta can do℠

EverEdge™

60" X 32"
Right Drain or Left Drain Bathtub

STANDARD SPECIFICATIONS:

- Caulkless Installation
- Direct-to-Stud Installation
- Made with High-Gloss ProCrylic™ Material
- Textured Bottom
- Soaking Depth 12 3/4" to overflow
- Water Capacity 48 gal
- 10 Year Limited Residential Warranty
- 1 Year Limited Commercial Warranty


COLOR/FINISH

- White

COMPLIES WITH:

- CSA B45.5/IAPMO Z124

Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2022 Delta Faucet Company

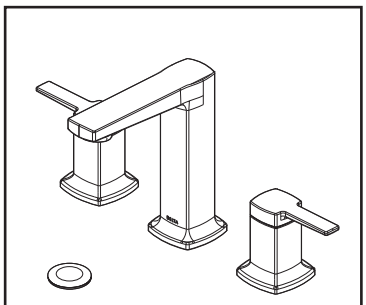


35823LF-▲

see what Delta can do™

BATHROOM FAUCET

- EverEdge™ Bath Collection
- Two Handle Widespread, Deck Mount

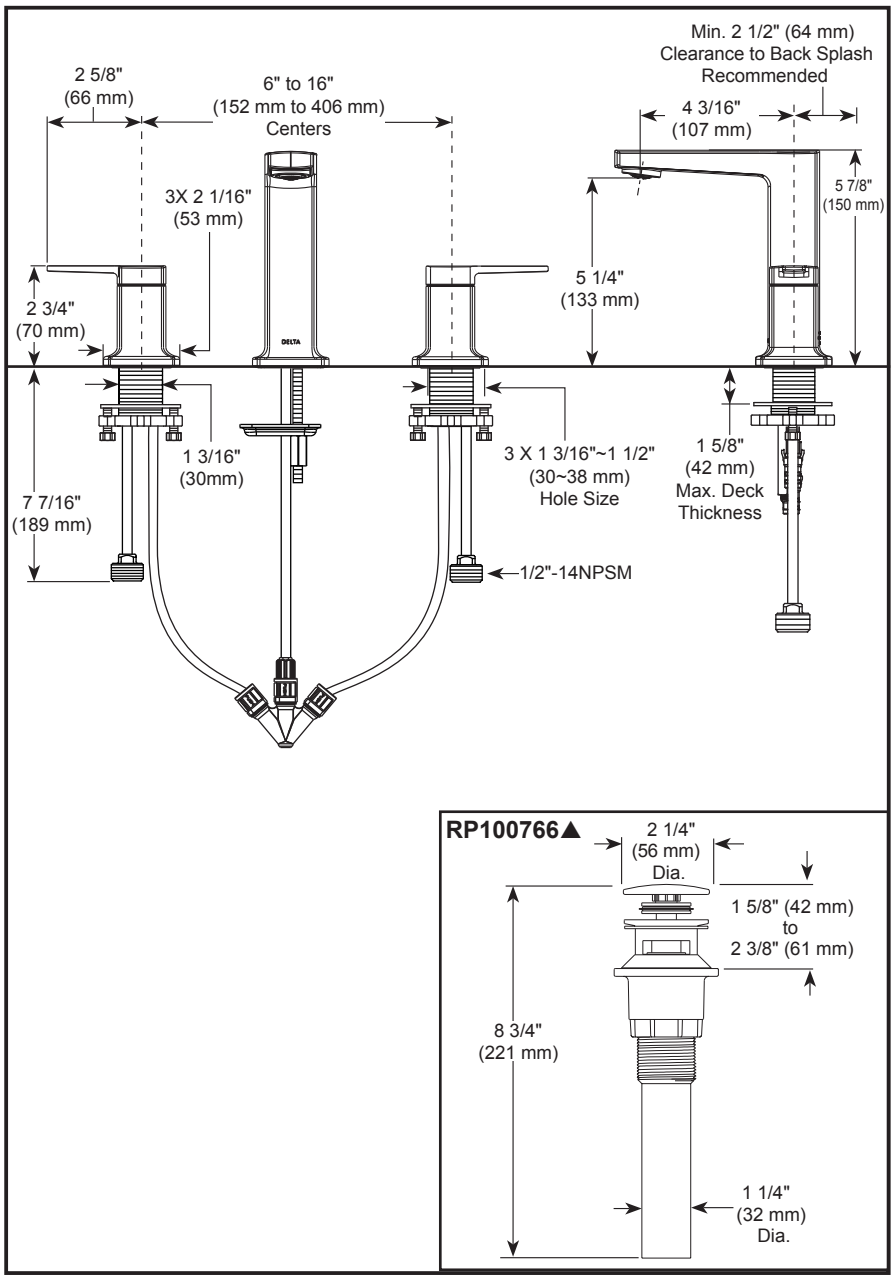

▲ Designate proper finish suffix

STANDARD SPECIFICATIONS:

- Max flow rate1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa.
- Three hole mount.
- Solid metal end valves and spout body.
- Hot and cold stems are interchangeable.
- 1/4 turn handle stops.
- 1/2"-14 NPSM adapters.
- Control mechanism is a rotating cylinder type with stainless steel plate and 90° rotation, with replaceable non-metallic seats.
- Models have plastic push pop-up with overflow with plated flange and stopper
- Note: Standard mounting deck thickness can be exended by 1" (25mm) with RP10612.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-35823LF Rev. A

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Delta Faucet Company