


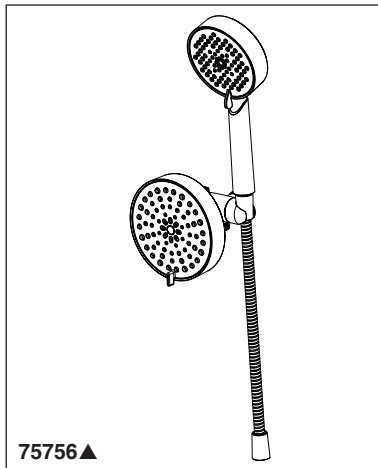

see what Delta can do™

HAND SHOWER/ SHOWER HEAD COMBO

- 4-Spray Setting Shower Head
- 5-Spray Setting Hand Shower

FEATURES:

- Touch-Clean® Spray Holes

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Hand shower with 5-spray settings; Full Spray, Shampoo Spray, Massage Spray, Full Spray w/Massage, and Pause. Pause is a non-positive shut-off.
- Shower head with 4-spray settings; Full Spray, Massage Spray, Full Spray w/Massage, and Pause. Pause is a non-positive shut-off.
- Model includes 3-way diverter shower arm mount
- 3-way diverter allows for single or shared operation of shower head and hand shower
- Adjustable shower arm mounting for hands-free showering
- 60" (1524 mm) stainless steel hose (BL finish uses UF (Ultraflex) plastic hose)
- Standard 1/2"-14 NPT pipe fitting


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®

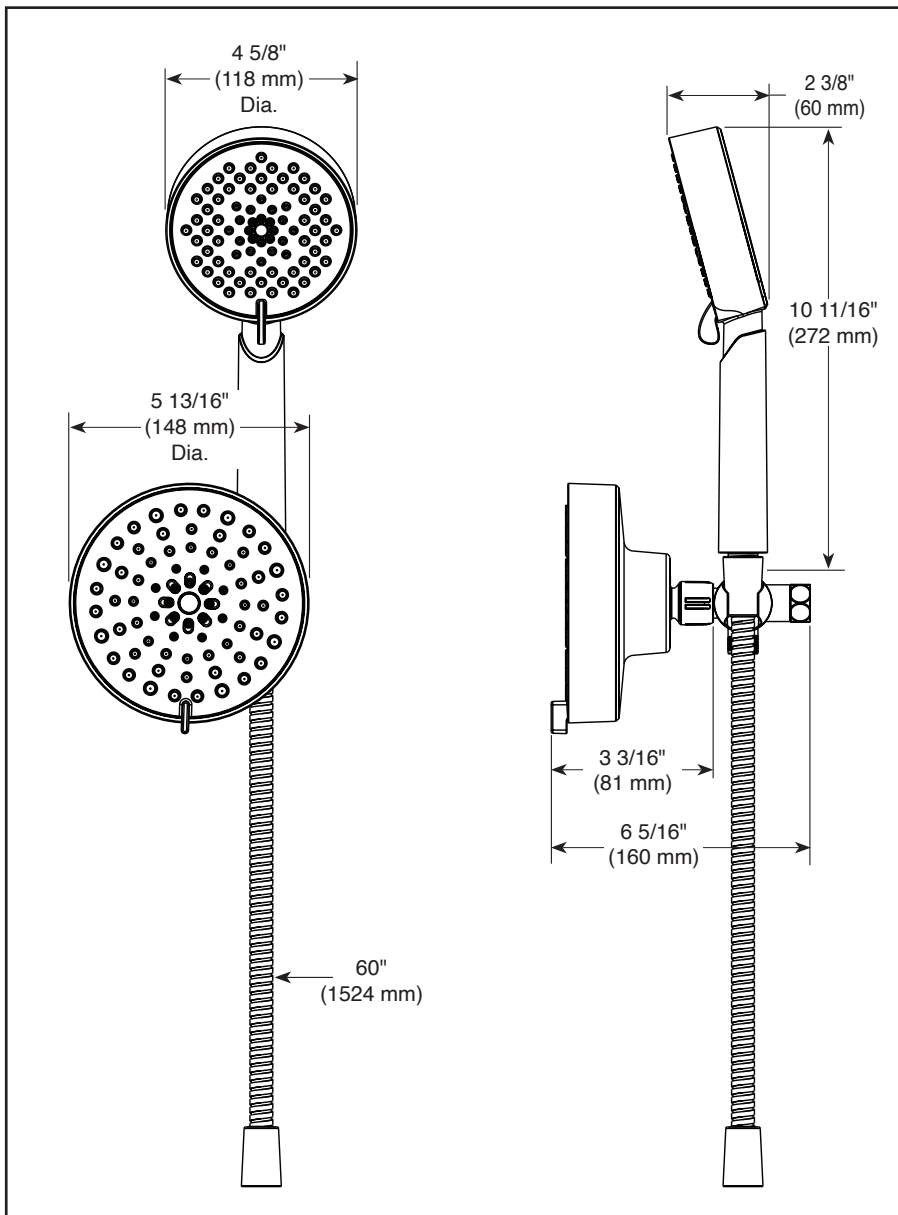


▲ Designate proper finish suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-75756 Rev. A


Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2025 Delta Faucet Company

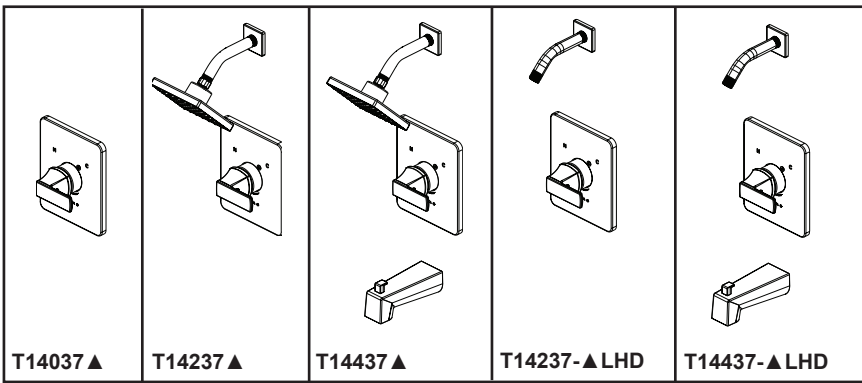


Submitted Model No.: _____

Specific Features: _____

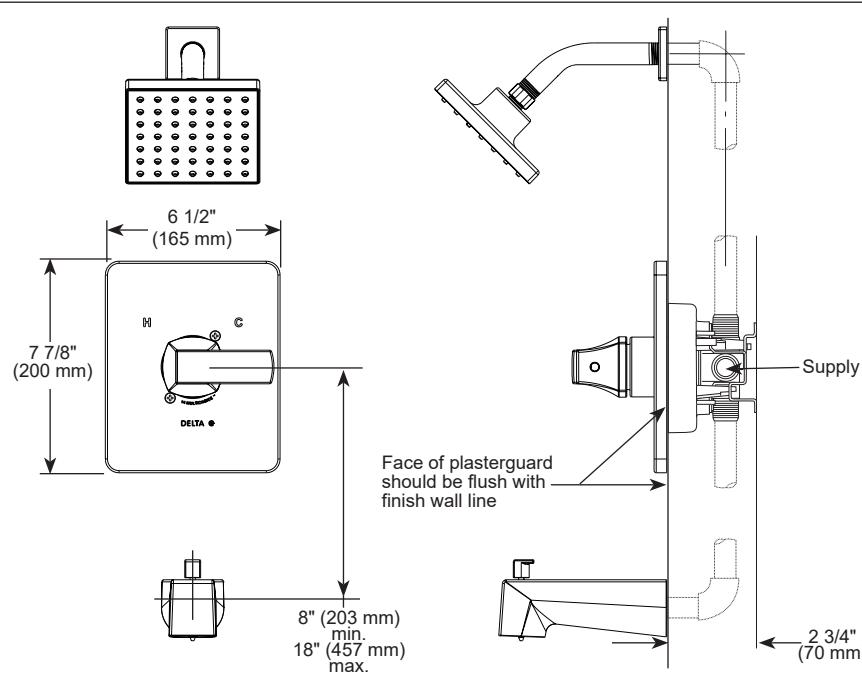


▲ Designate Proper Finish Suffix


RP101849 ▲ (Pull-Up Diverter)



RP77991 Available Extension Kit



RP101846 ▲ 1.75 GPM Shower Head

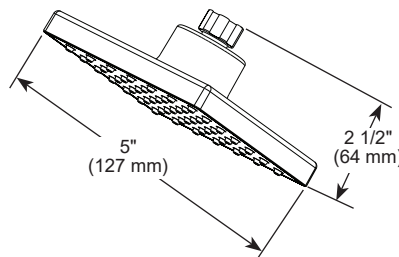

see what Delta can do™

TUB AND SHOWER FAUCET TRIM

- Velum™ Bath Collection
- Valve Only (T14037)
- Shower Only (T14237 & T14237-LHD)
- Tub/Shower (T14437 & T14437-LHD)

FEATURES:

- Monitor® 14 Series pressure balanced single handle mixing valve trim

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve
- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 414 kPa
- Tub port maximum flow rate 6.0 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- "LHD" models have pad printed red/blue temperature indication less shower head
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to T14237 & T14437 only