

see what Delta can do™

TUB AND SHOWER FAUCET TRIM

- Kayra® Bath Collection
- Valve Only (T17033 Series)
- Shower Only (T17233 & T17233-I Series)
- Tub/Shower (T17433 & T17433-I Series)

FEATURES:

- Monitor® 17 Series pressure balanced bath mixing valve trim
- Shower heads include H₂Okinetic® Technology
- In2ition® available select models with -I suffix

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Lever volume control handle; temperature adjustment dial
- Field adjustable to limit handle rotation into hot water zone
- Maximum dial rotation adjustable between 90° and 180°
- All parts replaceable from the front of the valve
- Tub port maximum flow rate 6.2 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Stem extension kit RP77992 can be ordered to allow for an additional 1 3/4" wall thickness. RP77992 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish.
- 4 Spray settings include: Full Body spray, Full Spray with Massage, Massaging spray, and Pause. Pause is a non positive shut-off. (58499-Δ)
- 5 Spray settings include: H₂Okinetic® spray, Full Body spray, Full Spray with Massage, Massaging spray, and Pause. Pause is a non positive shut-off. (52669-Δ)

WARRANTY:

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.








COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to T17233-Δ, T17433-Δ, T17233-Δ-I, T17433-Δ-I, 58499-Δ & 52669-Δ only
- ♻️ ICC/ANSI A117.1 - Valve control only

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company

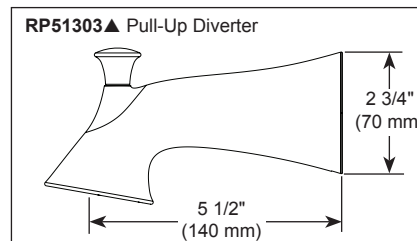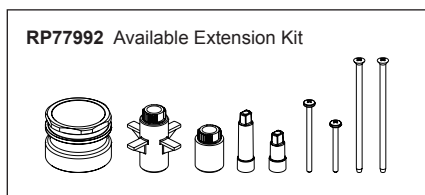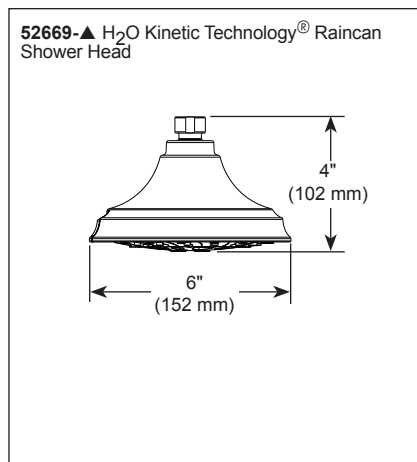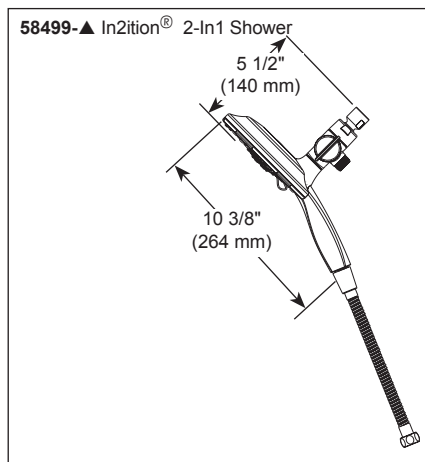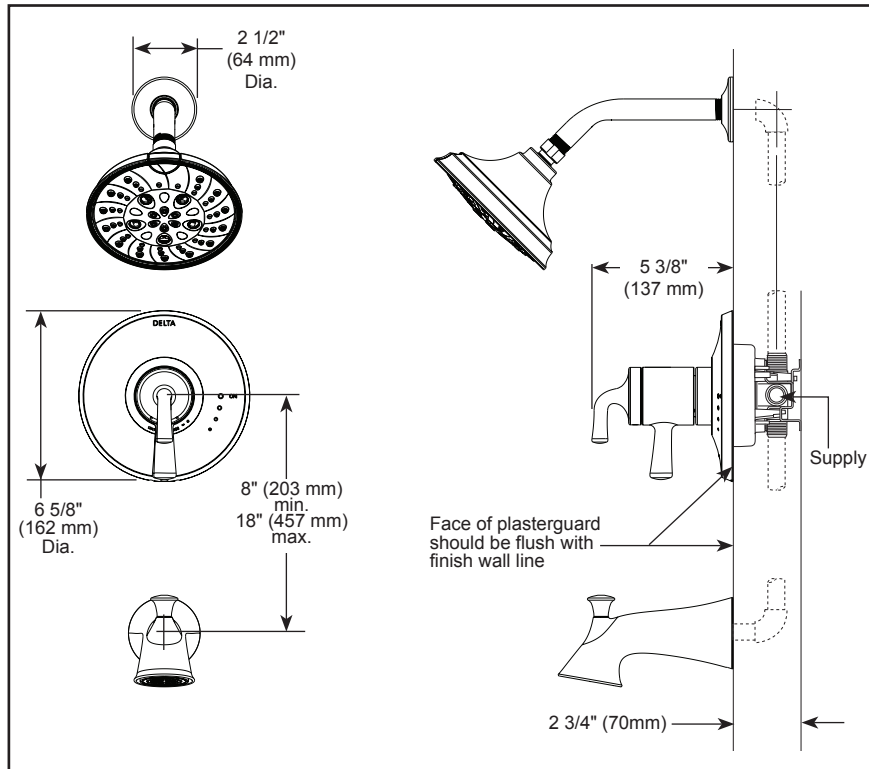

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.