


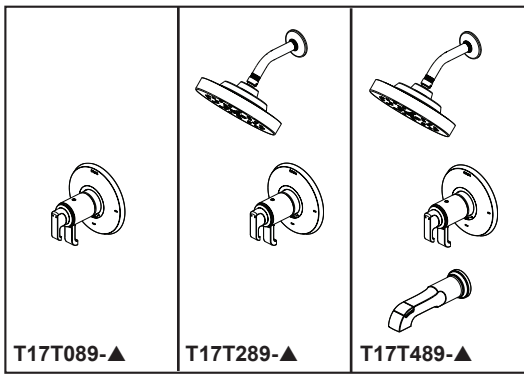

see what Delta can do™

TUB AND SHOWER FAUCET TRIM

- Tetra® Bath Collection
- Valve Only (T17T089)
- Shower Only (T17T289)
- Tub/Shower (T17T489)

FEATURES:

- TempAssure® 17T Series thermostatic valve cartridge
- H₂Okinetic® UltraSoak™ Spray
- H₂Okinetic® PowerDrench® Spray
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Thermostatic wax element maintains the outlet temperature to $\pm 3.6^\circ\text{F}$
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Tub port maximum flow rate 8.6 gpm @ 60 psi with R10000-UNBX
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment dial
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Red/blue pad print temperature indicators on temperature adjustment dial
- Adjusts for up to 1" wall thickness
- Stem extension kit RP75136 can be ordered to allow for an additional 1 3/4" wall thickness. RP75136 ships with chrome escutcheon screws.
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Universal adapter included allows for thread, sweat or slip-on installation of RP102060 and RP102061
- 5 Spray settings include: H₂Okinetic® PowerDrench® spray, Massaging spray, H₂Okinetic® UltraSoak™ spray, and Pause. Pause is a non positive shut-off.

WARRANTY:

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.






COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to T17T289-▲, T17T489-▲ & 52488-▲ only
- ♿ ICC/ANSI A117.1 - Valve control only

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company

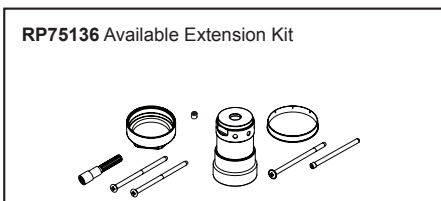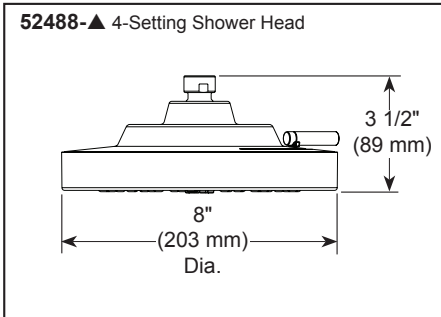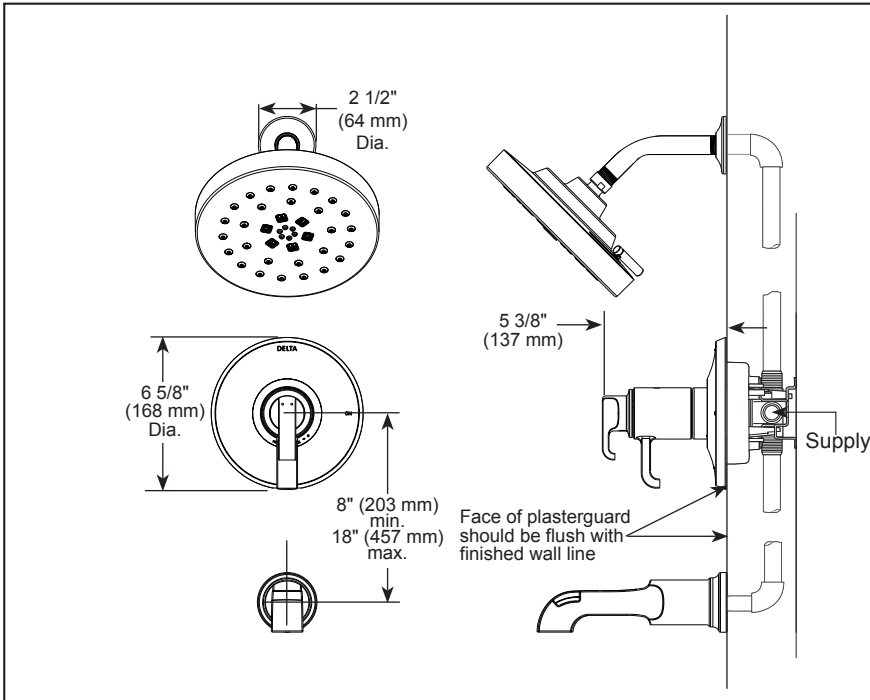

▲ Designate Proper Finish Suffix

