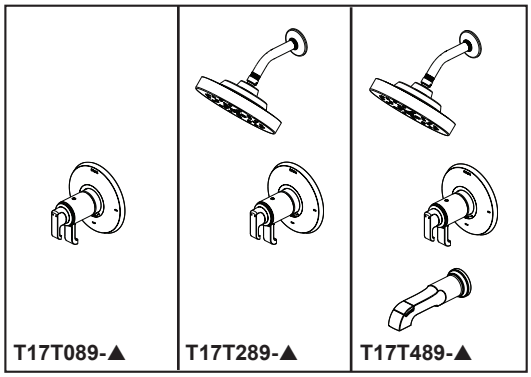


see what Delta can do™

TUB AND SHOWER FAUCET TRIM

- Tetra® Bath Collection
- Valve Only (T17T089)
- Shower Only (T17T289)
- Tub/Shower (T17T489)

FEATURES:

- TempAssure® 17T Series thermostatic valve cartridge
- H_2Okinetic® UltraSoak™ Spray
- H_2Okinetic® PowerDrench® Spray
- Lumicoat® Finish (-PR models only)
- Lumicoat® Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:


- Max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Thermostatic wax element maintains the outlet temperature to ± 3.6 °F
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Tub port max flow rate 8.6 gpm @ 60 psi with R10000-UNBX
- Back-to-back installation capability
- Lever volume control handle; temperature adjustment dial
- Field adjustable to limit handle rotation into hot water zone
- All parts replaceable from the front of the valve
- Red/blue pad print temperature indicators on temperature adjustment dial
- Adjusts for up to 1" wall thickness
- Stem extension kit RP75136 can be ordered to allow for an additional 1 3/4" wall thickness. RP75136 ships with chrome escutcheon screws.
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Universal adapter included allows for thread, sweat or slip-on installation of RP102060 and RP102061
- 4 Spray settings include: H_2Okinetic® PowerDrench® spray, Massaging spray, H_2Okinetic® UltraSoak® spray, and Pause. Pause is a non positive shut-off.

WARRANTY:


- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:


- ASME A112.18.1 / CSA B125.1
- ASSE 1016 / ASME A112.1016 / CSA B125.16
- EPA WaterSense® - Applies to T17T289-▲, T17T489-▲ & 52488-▲ only
- ICC/ANSI A117.1 - Valve control only

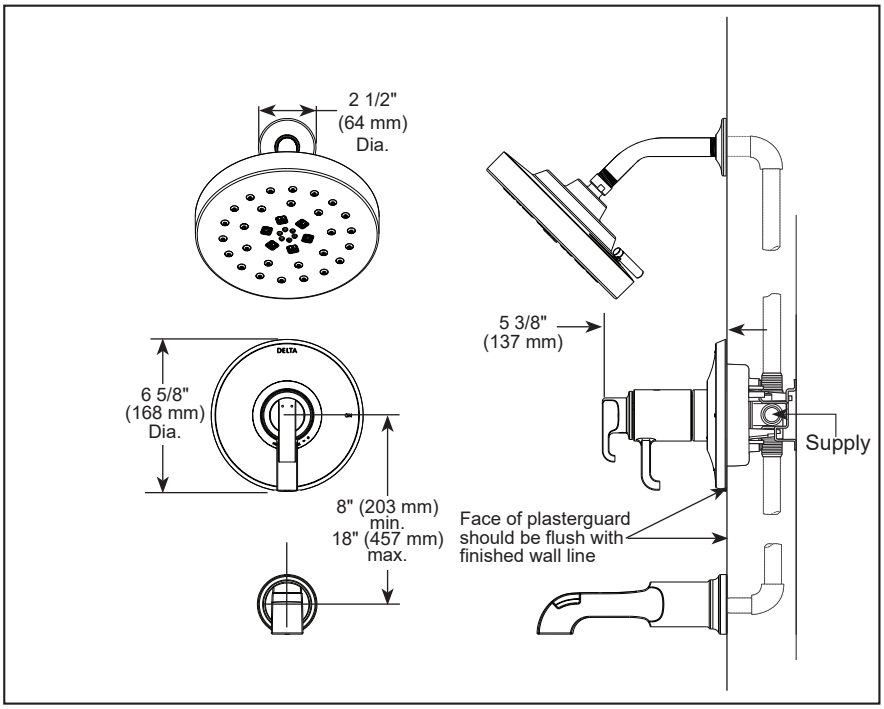


52488-▲ 4-Setting Shower Head

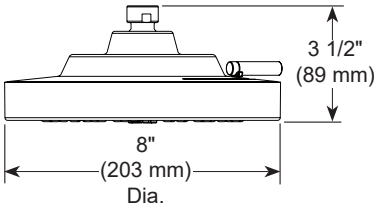


RP102060▲ Pull-Up Diverter

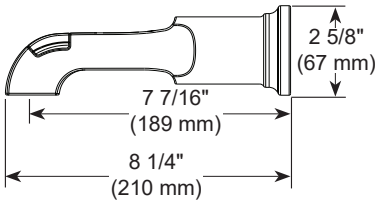

RP102061▲ Non-Diverter

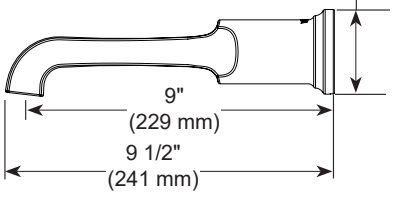

RP75136 Available Extension Kit



▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company
55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company