

Hardwire Converter with Battery Back-up

TECK[®]
COMMERCIAL



HARDWIRE CONVERTER WITH BATTERY BACK-UP

Hardwire Converter with Battery Back-up for Delta 6 VDC products listed below:

(To order as part of complete product from factory,
add “-BB” suffix to the model number.)

FOR USE ON ELECTRONIC FAUCETS


590T, 591T, 600T, 860T, 1500T3, 1500T4,
3000TA, 590/591/596 -HDF SERIES

FOR USE ON ELECTRONIC VALVES

81T with Body Mounted Sensor
81T-WMS with Wall Mounted Sensor
1600T

061047A

To convert installed product in field,
order the 061047A kit pictured below.

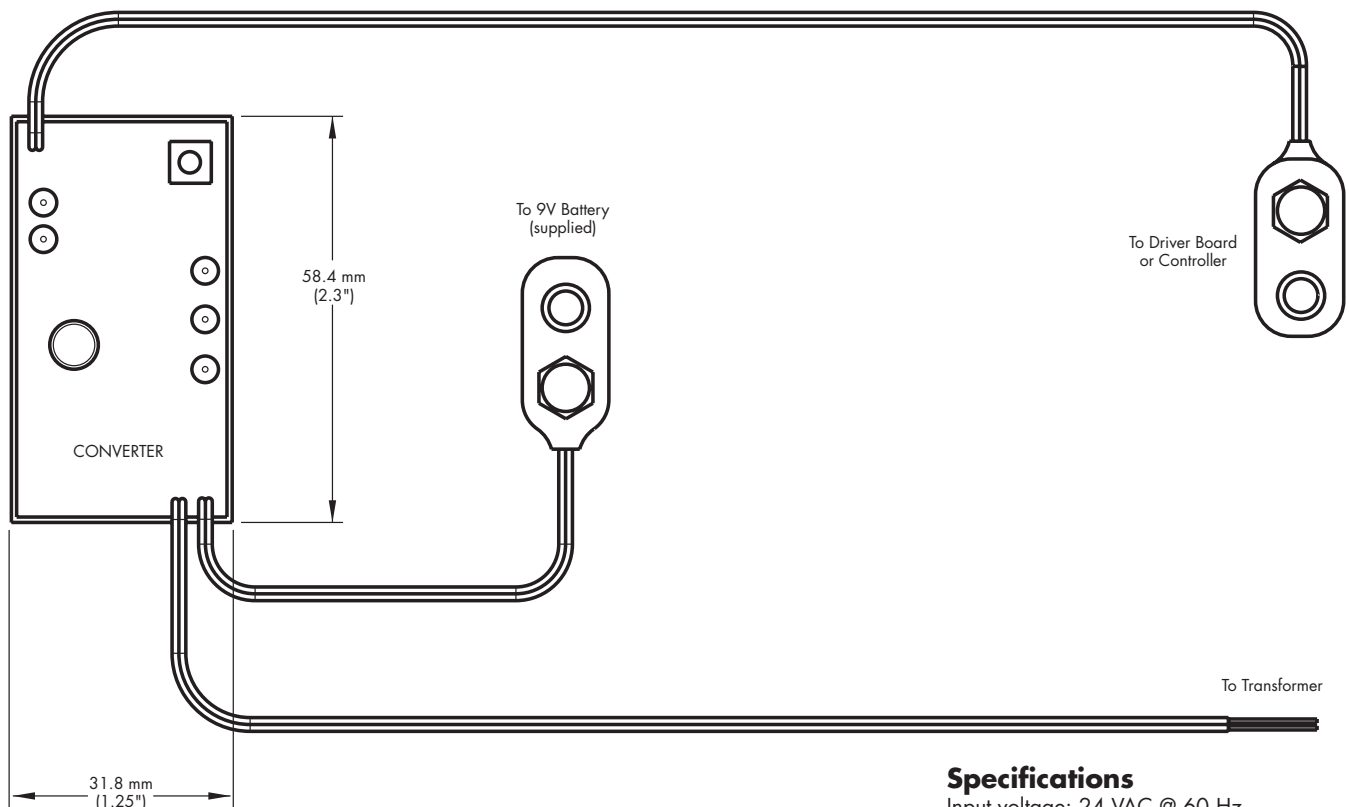

Specifications

Input voltage: 24 VAC @ 60 Hz

Output voltage: 5 VDC \pm 5%

Current Draw: 600 MA

Operating Temperature Range: -55°C to 85°C

Battery Back-up: with 9V Battery

Note: Measurements may vary \pm 6mm (0.25")

Refer to www.specselect.com for individual models.