

**OPTIONAL HARDWIRE CONVERTER
WITH BATTERY BACK-UP**

061047A

Hardwire Converter with Battery Back-up for Delta 6 VDC products listed below (if ordered separately).


- Add “-BB” suffix to model series product number

FOR USE ON ELECTRONIC FAUCETS

590T, 591T, 600T, 860T, 1500T3, 1500T4,
3000TA, 590/591/596 -HDF SERIES

FOR USE ON ELECTRONIC VALVES

81T with Body Mounted Sensor
81T-WMS with Wall Mounted Sensor
1600T

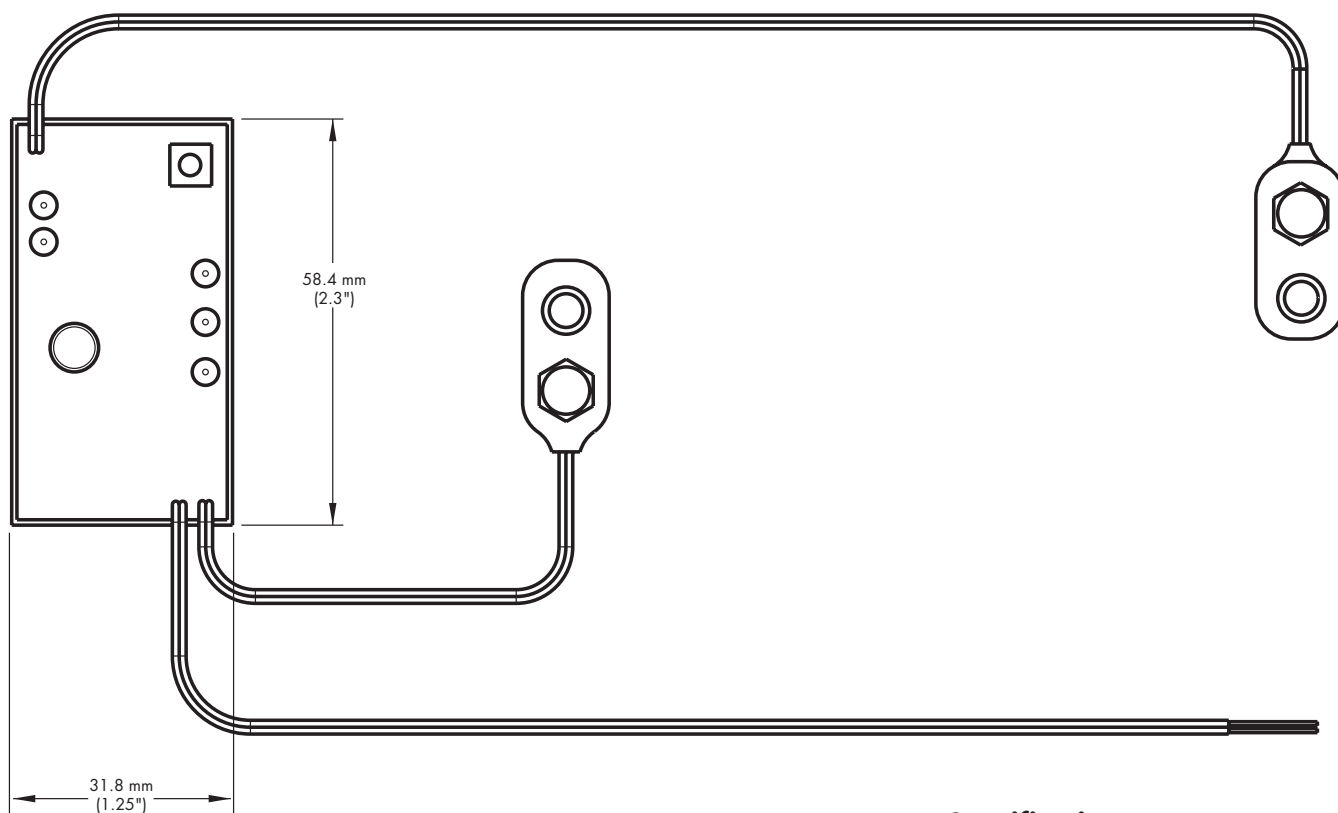

Specifications

Input voltage: 24 VAC @ 60 Hz
Output voltage: 5 VDC ± 5%
Current Draw: 600 MA
Operating Temperature Range: -55°C to 85°C
Battery Back-up: with 9V Battery

Note: Measurements may vary ± 6mm (0.25")

Refer to www.specselect.com for individual models.