



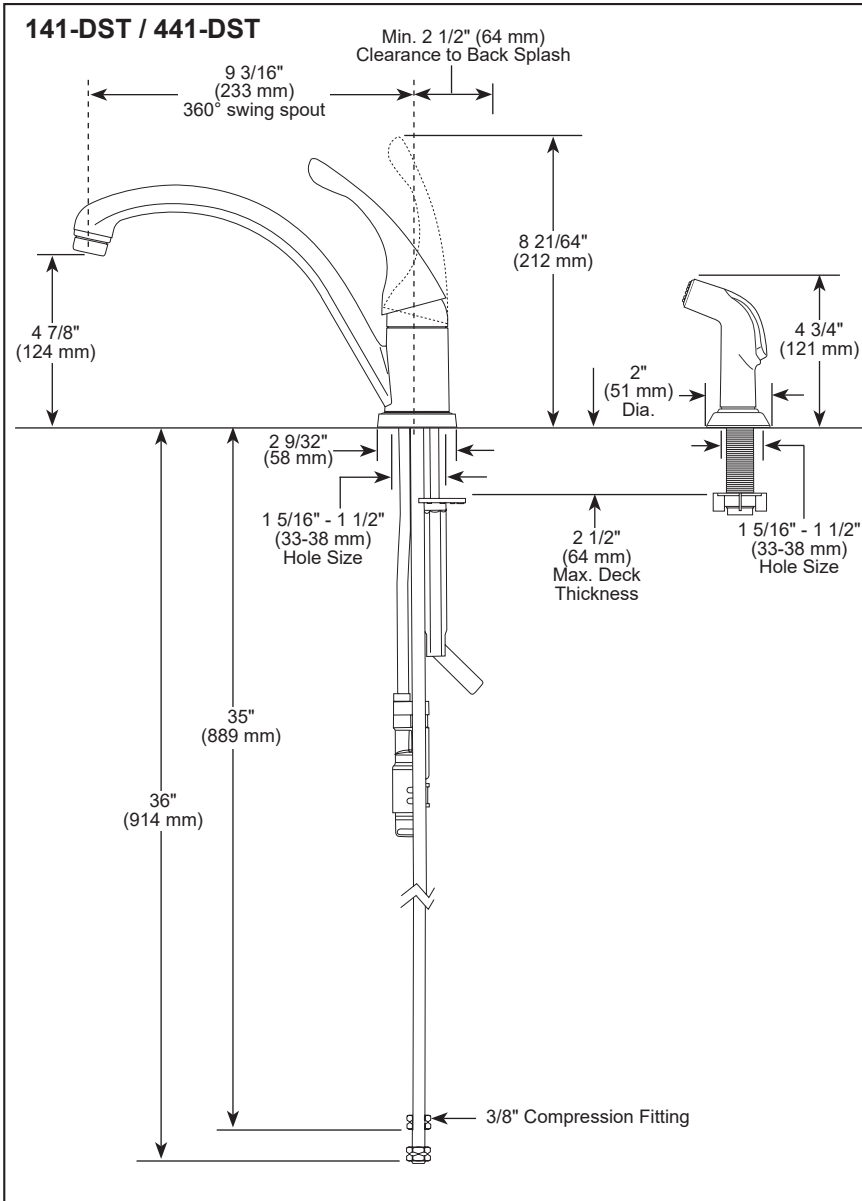

see what Delta can do™

KITCHEN FAUCETS

- Collins® Series
- Single Handle Deck Mount
- 1 and 2 Hole Sink Applications
- DIAMOND Seal® Technology

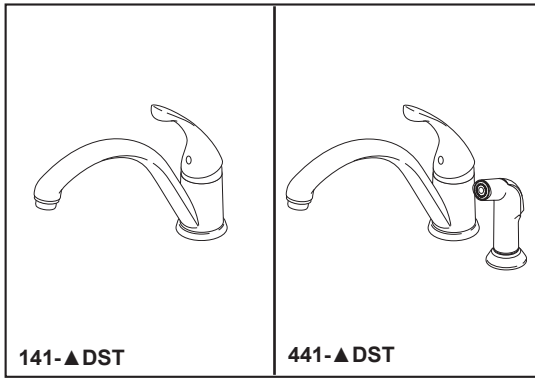

▲ Designate Proper Finish Suffix

STANDARD SPECIFICATIONS:

- Max. flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa.
- Spout rotates 180°.
- Lever handle shall return to neutral position when valve is turned off.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Red/blue graphics on handle button to indicate hot/cold temperature.
- Model 441 series with spray attachment has anti-siphon device as integral part of faucet.
- Vegetable sprayer hose installation on model 441 series.
- 3/8" O.D. straight, staggered PEX supply tubes
- Standard 3/8" (10 mm) compression gasket fittings

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ♿ ICC/ANSI A117.1 - Valve control only

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company
 55 E. 111th Street, Carmel, IN 46280
 350 South Edgeware Road, St. Thomas, ON N5P 4L1
 © 2026 Delta Faucet Company