





KITCHEN FAUCETS

- Waterfall® Series
- Two Handle Widespread Deck Mount
- 3 and 4 Hole Sink Applications

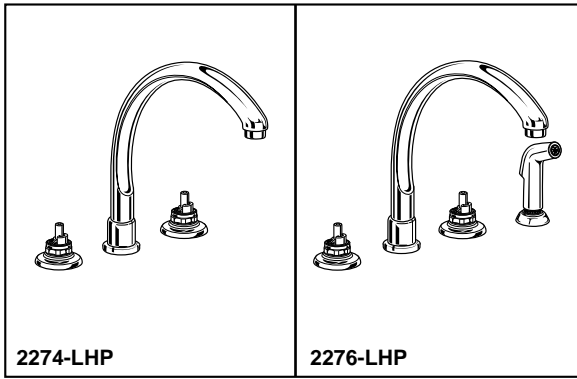

Submitted Model No.: _____

Specific Features: _____

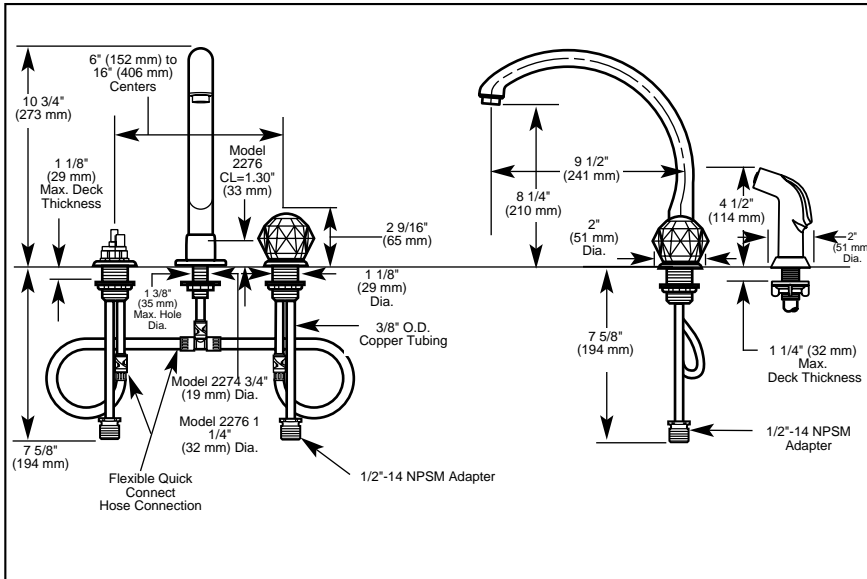

STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread - 6" (152 mm) to 16" (406 mm) centers.
- 9 1/2" (241 mm) long, 10 3/4" (273 mm) high spout swings 360°.
- Hot and cold stems are interchangeable.
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- Quick Snap® hose installation.
- 3/8" O.D. copper supply tubes with 1/2"-14 NPSM adapters.
- Models 2276-WF and 2276-LHP Series with spray attachment have anti-siphon device as integral part of valve body.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.

Available LHP Handle Options ▲ Specify Finish


H21 1" (25 mm)	H24▲ A24▲ 3 1/4" (83 mm)	H25▲ 2 5/16" (59 mm)	H27▲ 1 1/4" (32 mm)	
H41 1 3/8" (35 mm)	H46▲ 1 1/4" (32 mm)	H48 1" (25 mm)	H212▲ 3" (76 mm)	H215▲ 2 5/16" (59 mm)

Available LHP Handle Accent Options



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates ADA compliance to ICC/ANSI A117.1
- IAPMO Listed
- CSA Certified

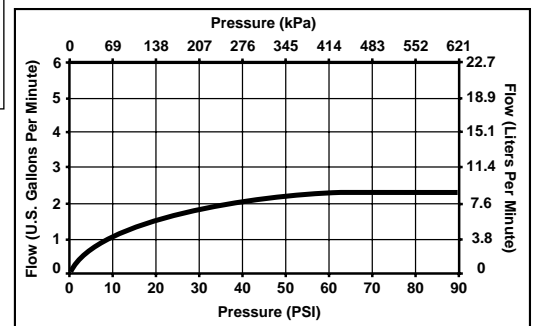

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book for finish options and product availability.

DSP-K-2274 Rev. C



Indianapolis, Indiana 46280
A Division of Masco Corporation of Indiana
© 2006 Masco Corporation of Indiana