

see what Delta can do™

## BAR / PREP SINK FAUCETS

- Leland® Collection
- Single Handle Widespread
- 2 Hole Sink Applications
- DIAMOND Seal® Technology
- Integrated Supply Tubes
- 2-Function Pull-Down

### STANDARD SPECIFICATIONS:


- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- RP60734 wand assembly available with Max flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Spout rotates 360°.
- Lever handle. Control shall return to neutral position when faucet is turned off.
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Disposable hose lead to aid installation.
- Recommended hole size 1 3/8" (35mm) on 4" (102mm) centers.
- 3/8" O.D. straight, staggered PEX supply tubes
- Touch-Clean® 2 function (stream spray) Spray Holes.
- MagnaTite® docking system secures sprayer to spout.

### WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to [www.deltafaucet.com](http://www.deltafaucet.com) for the complete details of our limited warranty.

### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ICC/ANSI A117.1 - Valve control only

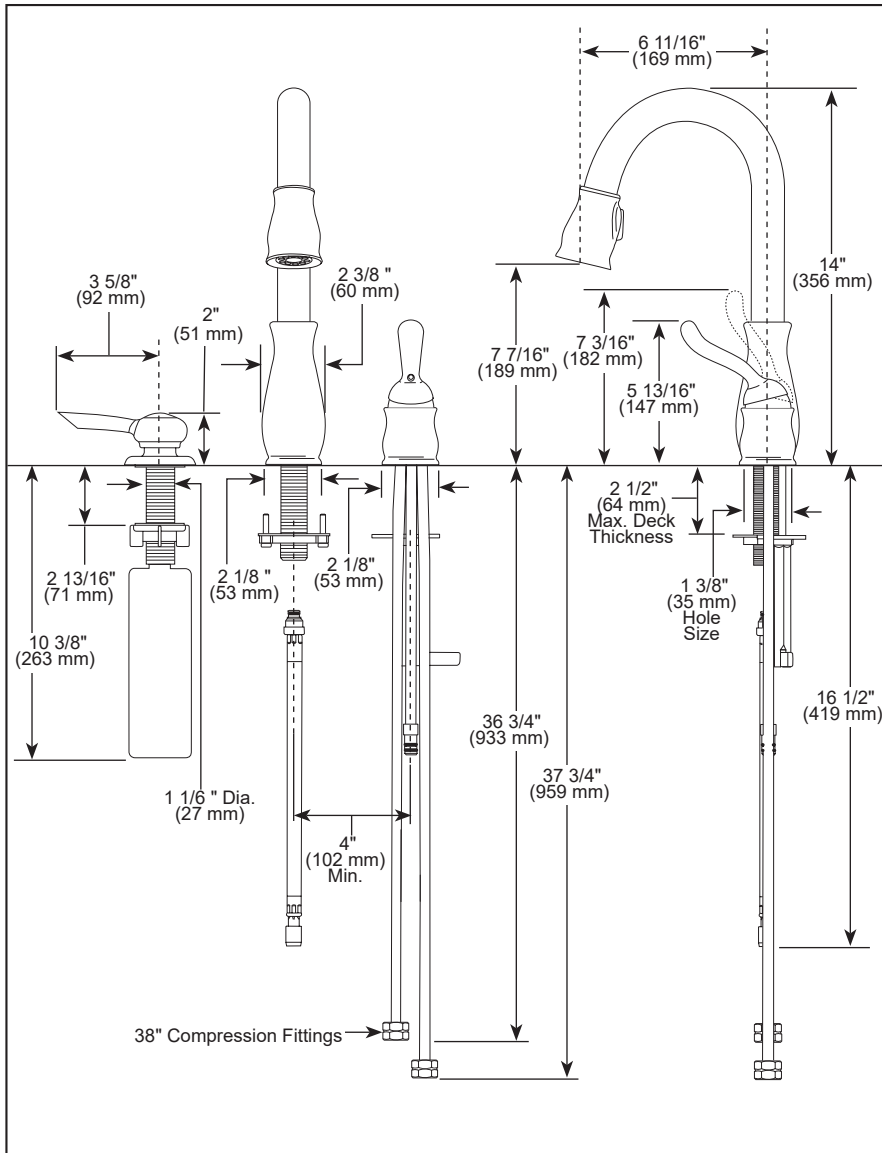

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

### Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2026 Delta Faucet Company