


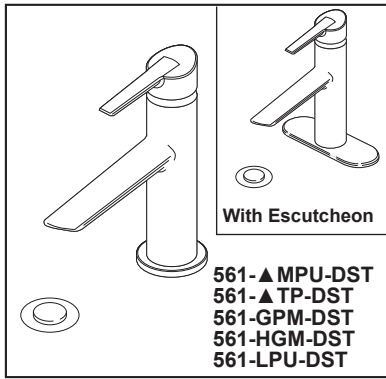

see what Delta can do™

BATHROOM FAUCETS

- Compel® Bath Collection
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa, aerated type flow
- GPM indicates max 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa, aerated type flow
- HGM indicates max.0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa, aerated type flow
- One or three-hole mount (escutcheon included)
- Diamond coated ceramic cartridge
- Optional red/blue indicator ring provided with model
- 1/4" O.D. straight, staggered PEX supply tubes
- Models have metal drain with push pop-up type fitting with plated flange and stopper, no lift rod hole
- "LPU" models less pop-up drain; no lift rod hole


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 & 372
- EPA WaterSense® - Applies to 561-MPU-DST, 561-TP-DST, 561-GPM-DST and 561-LPU-DST
- ICC/ANSI A117.1 - Valve control only

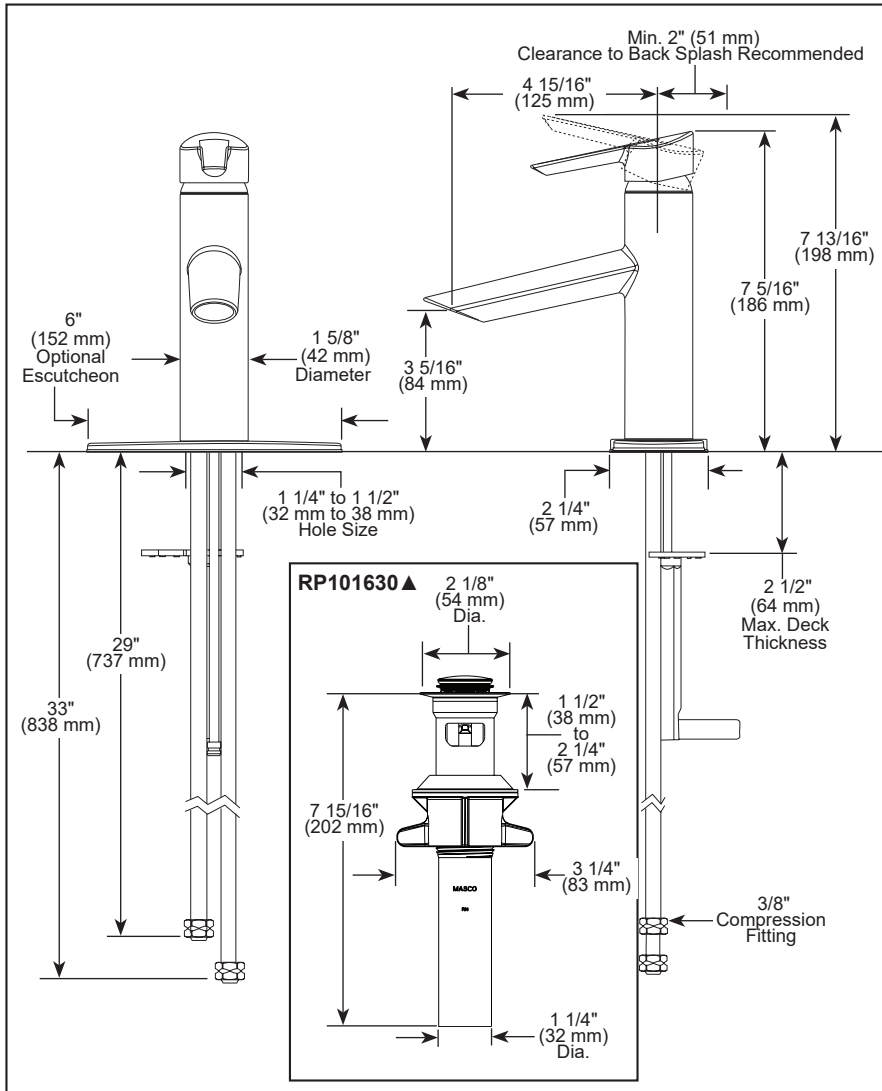

▲ Designate Proper Finish Suffix