


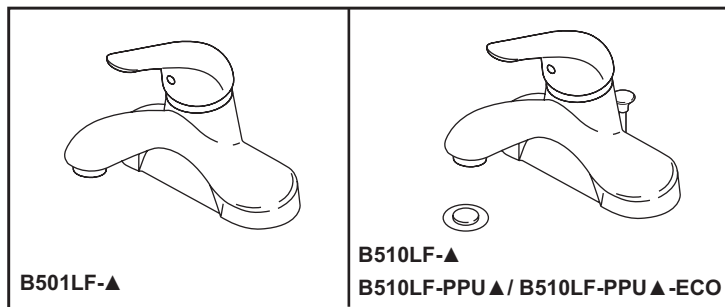

see what Delta can do™

BATHROOM FAUCETS

■ Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa (B501LF, B510LF & B510LF-PPU-ECO)
- Max. flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa (B510LF-PPU)
- Solid brass fabricated body
- Single handle lavatory faucets for exposed mounting on 3 hole sinks with 4" centers
- All operating parts shall be replaceable from the top
- Control mechanism is the rotating stainless steel ball type with replaceable non-metallic seats
- Control handle shall return to neutral position when valve is turned off
- Metal drain with pop-up type fitting with plated flange and stopper
- Models with "PPU" have plastic pop-up type fitting with plated flange and stopper
- Models with "LH" no drain and no lift rod hole


WARRANTY:

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- NSF/ANSI/CAN 61 & 372
- EPA WaterSense®
- ICC / ANSI A117.1 - Valve control only

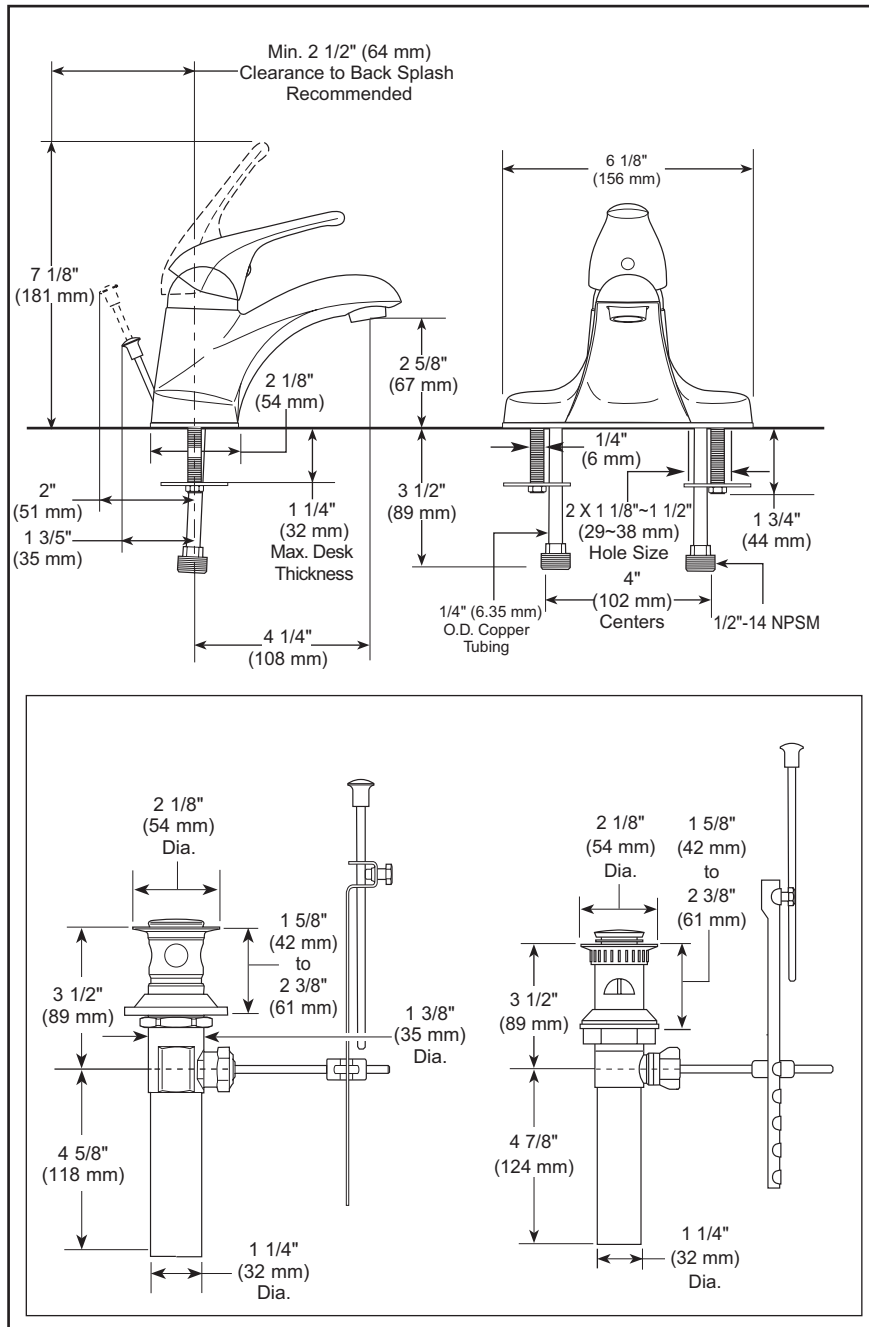

▲ Designate proper finish suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company