

BRIZO®

BATHROOM FAUCET

■ Litze® Bath Collection

■ Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max flow rate 1.5 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- Max flow rate (ECO models only) 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- Knurl or Teak accents
- Control mechanism - 28 mm ceramic mixing cartridge with metal stem and 90° rotation
- 1/2-14 NPSM threaded inlets
- Spout features hidden water efficient laminar flow aerator
- Solid brass fabricated body
- Drain sold separately


WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.brizo.com for the complete details of our limited warranty.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- EPA WaterSense®
- ICC/ANSI A117.1 - Valve control only

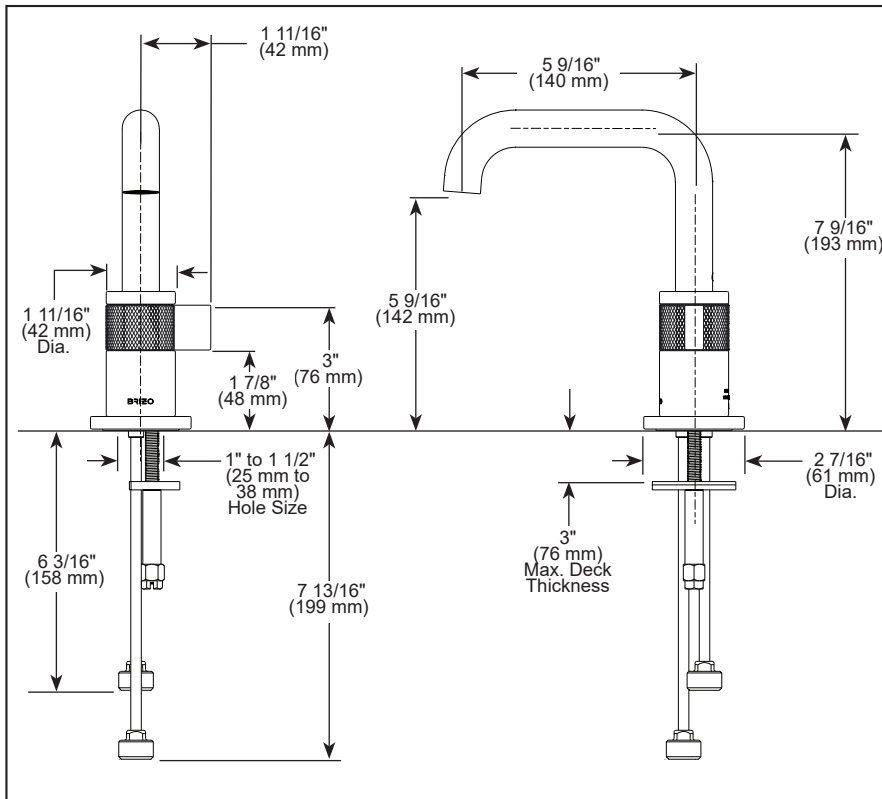

RP72411▲ Grid Strainer Drain less overflow holes 	RP72413▲ Push Button Drain less overflow holes 	RP81627▲ Push Button Drain less overflow holes
RP72412▲ Grid Strainer Drain with overflow holes 	RP72414▲ Push Button Drain with overflow holes 	RP81628▲ Push Button Drain with overflow holes

▲ Designate Finish Suffix

Brizo reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-L-65035LF Rev. G

Brizo Kitchen & Bath Company

55 E. 111th Street, Carmel, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Brizo Kitchen & Bath Company