


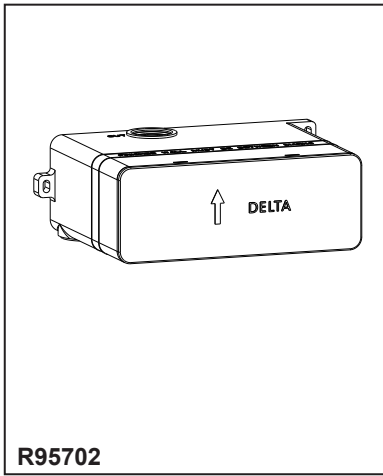

see what Delta can do™

## NON-THERMOSTATIC PUSH BUTTON SHOWER MIXER ROUGH WITH 2 OUTLETS


### ■ Choice Dway® Collection

#### STANDARD SPECIFICATIONS:

- Single Lever Mixer for precise temperature and flow control with individual push button On/Off.
- Solid Metal Construction: Single piece brass casted body for maximum durability.
- Premium 35mm ceramic cartridge with diamond hard ceramic disc.
- Robust Leak-Proof Design: 100% leak tested.
- Integrated Bracket for On-Wall Installation: Provides adequate strength to take the load of entire rough.
- Engineered Plastic Protective Guard: Robust protection against dust and damage and reduces risk of theft and vandalism during construction.
- Error Free Installation: Rectangular shape protective guard with engraved min-max markings for a perfect horizontal installation.
- Easy to install with standard 1/2" inlet and outlet connections. Must order Trim T57702-LHP (in Finishes).

#### COMPLIES WITH:

- The mechanical performance of volume control & On /Off valve meet ASME A112.18.1/CSA B125.1

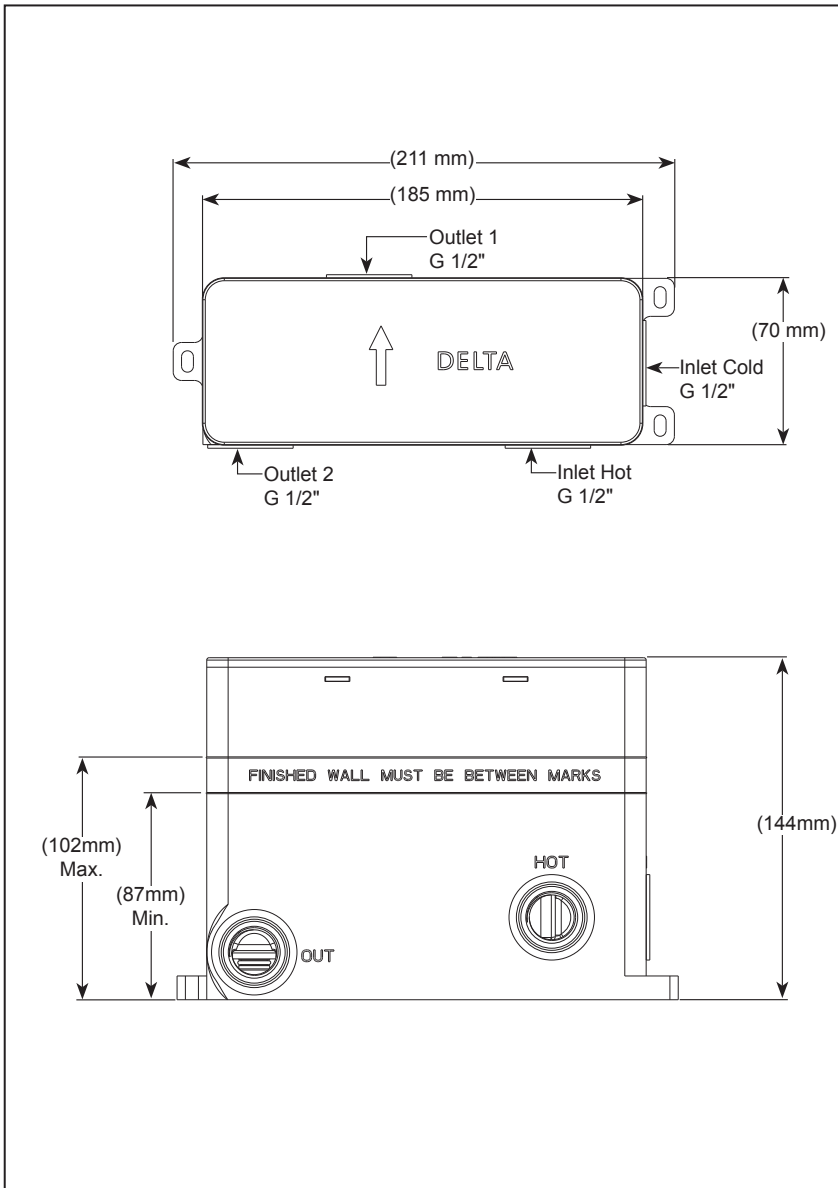

| Pressure<br>(Bar) | Flow rate (L/Min) |             |               |
|-------------------|-------------------|-------------|---------------|
|                   | 1<br>outlet       | 2<br>outlet | 1+2<br>outlet |
| 1                 | 14.85             | 13.90       | 17.05         |
| 2                 | 21.10             | 19.85       | 24.90         |
| 3                 | 25.75             | 24.35       | 30.97         |
| 4                 | 29.45             | 28.25       | 35.75         |
| 5                 | 32.85             | 31.50       | 40.05         |