

see what Delta can do™

KITCHEN FAUCETS


- Stryke® Collection
- Single Handle Pull-Down

FEATURES:

- Touch₂O® with Touchless Technology
- DIAMOND Seal® Technology
- Touch-Clean® Spray Holes
- MagnaTite® Docking System
- Lumicoat® Finish (metallic finishes only)
- VoicelQ® Technology

STANDARD SPECIFICATIONS:

- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One or three hole mount (escutcheon not included, order separately)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply lines
- Spout rotates 360°
- Hot/cold indicator markings
- Dual integral check valves in sprayer assembly
- Two-function wand; Aerated stream or spray
- LED indicator light signals on-off, water temperature and low batteries
- Touch₂O® with Touchless Technology operates on 6 AA (included) with a battery life of approximately 1 year, 6 C (not included) with a battery life of approximately 3 years, or optional 120V AC adapter EP102157 (included) (3 prong grounded outlet required)
- Toggles between Touchless and Touch₂O® Technology
- VoicelQ® Technology for voice controlled dispensing
- For operation of VoicelQ® Technology, a wall outlet underneath the sink that isn't controlled by a switch is required

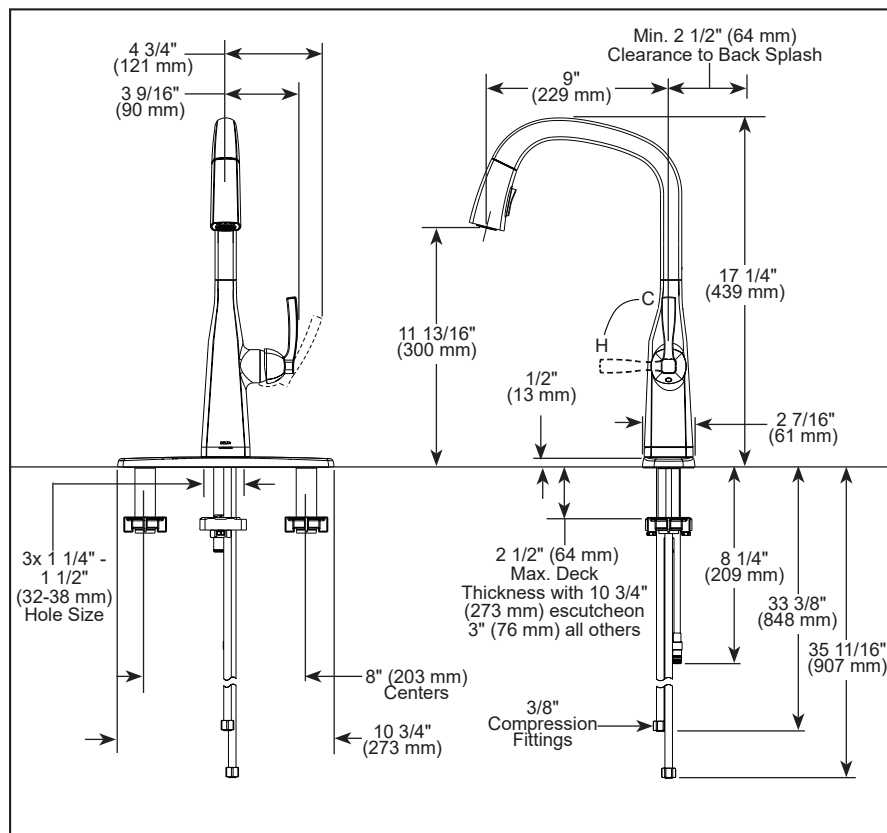

▲ Designate proper finish suffix

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Electronic Parts and Batteries (if applicable) - 5 years from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.); or for commercial purchasers, 1 year from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.). No warranty is provided on batteries.
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ICC/ANSI A117.1 - Valve control only

