


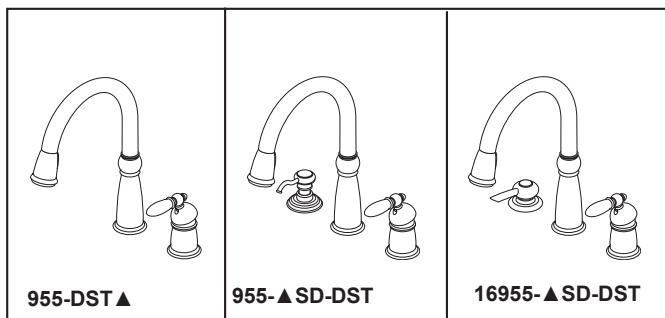

see what Delta can do™

KITCHEN FAUCETS

- Victorian® Collection
- Single Handle Widespread
- 2 or 3 Hole Sink Applications
- Optional Soap Dispenser
- DIAMOND Seal® Technology
- MagnaTite® Docking System
- 2-Function Pull-Down

STANDARD SPECIFICATIONS:


- Max flow rate 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- Spout rotates 360°.
- Control mechanism shall be the diamond coated ceramic cartridge.
- Lever handle. Control shall return to neutral position when faucet is turned off.
- Touch-Clean® 2 function (stream/spray) Spray Holes.
- Magnetic docking system secures sprayer to spout.
- Staggered PEX supply tubes
- Finished handle button with red/blue graphics to indicate hot/cold temperature.
- Integral double check valves in sprayer assembly.
- Recommended hole size 1 3/8" (35 mm) on 4" (102 mm) centers.
- RP60735 wand assembly available with flow rate of max flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa
- **Note:** See 9955* for matching bar/prep.

WARRANTY

- Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date the product is received by the original purchaser or their authorized representative (installation contractor, etc.).
- Please go to www.deltafaucet.com for the complete details of our limited warranty.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- NSF/ANSI/CAN 61 & 372
- ICC/ANSI A117.1 - Valve control only

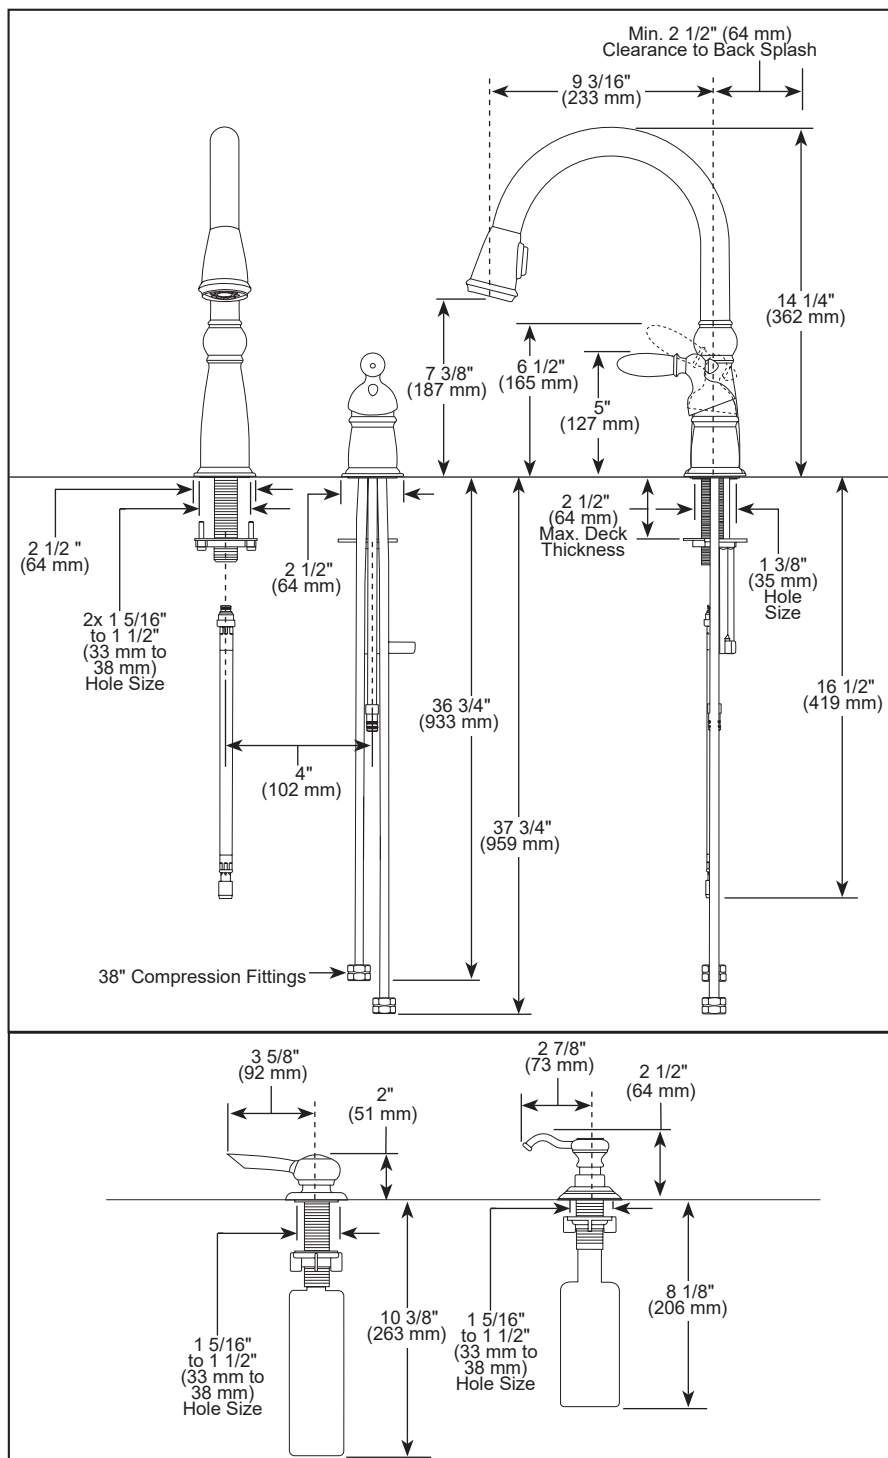

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-955-DST Rev. E

Delta Faucet Company

55 E. 111th Street, Carmel, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2026 Delta Faucet Company